Tower Lights

Altech's line of tower lights feature quality construction at an affordable price. Available in 1-5 lens models, our tower lights are completely customizable with 5 different color choices that provide 360 degrees of viewing area. Standard mounting choices are base or pole mount. Light options include steady-on, flashing, or in any combination. Altech's Tower Lights will meet almost any requirement of your Tower Light needs.

Available Voltages:

- 12V DC (AC)
- 24V DC (AC)
- 110V AC
- 220V AC

Model Designation

TPTL | 220 | — | 5 | — | ROGBW

① ② ③ ④

Designation	Signal	Description	
1. Type	TPTL	Steady-on Light	Pole mount
	TPTF	Flashing Light	
	TPWL	Steady-on Light	Base mount
	TPWF	Flashing Light	
2. Voltage	12	12VDC(AC)	
	24	24VDC(AC)	
	110	110VAC	
	220	220VAC	
3. Sections	1	1 Section	
	2	2 Sections	
	3	3 Sections	
	4	4 Sections	
	5	5 Sections	
4. Lens Color (From top to bottom)	R	Red	
	O	Orange	
	G	Green	
	B	Blue	
	W	White	

TPTL • TPTF

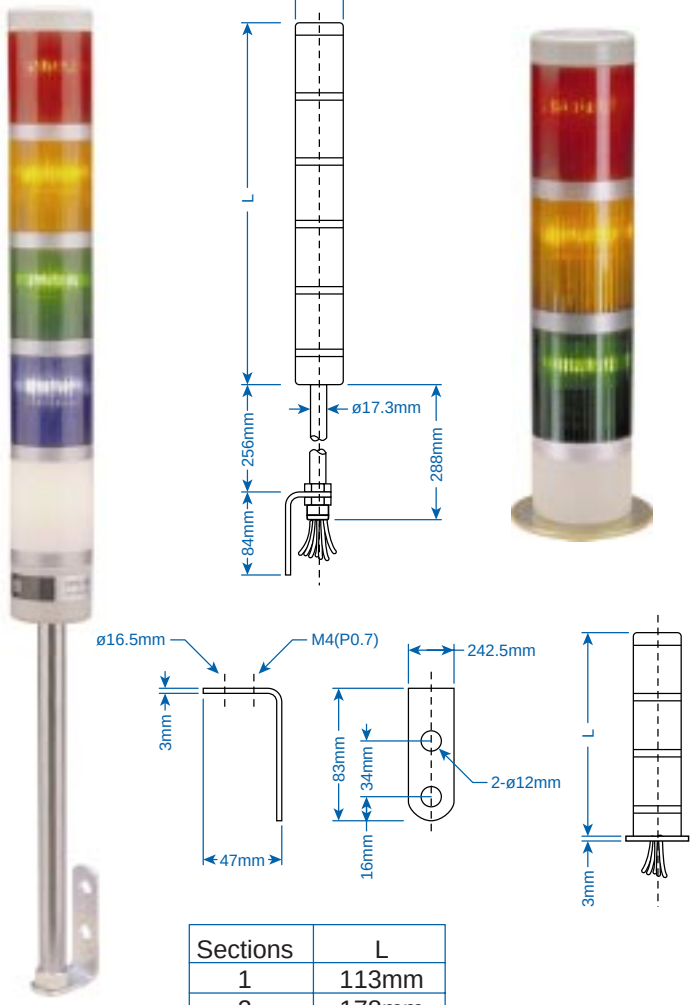

TPWL • TPWF

Sections	L
1	113mm
2	178mm
3	243mm
4	308mm
5	373mm

Dimmensions shown in mm.
To convert to inches multiply by 0.03937.

Application examples:

- Multi status signaling in factories, warehouses, and offices.
- Visual signaling of equipment malfuntion.

Altech Corp.®
35 Royal Road
Flemington, NJ 08822-6000
Phone (908) 806-9400 • Fax (908) 806-9490
www.altechcorp.com

Altech Corp.® 111-079-8M