

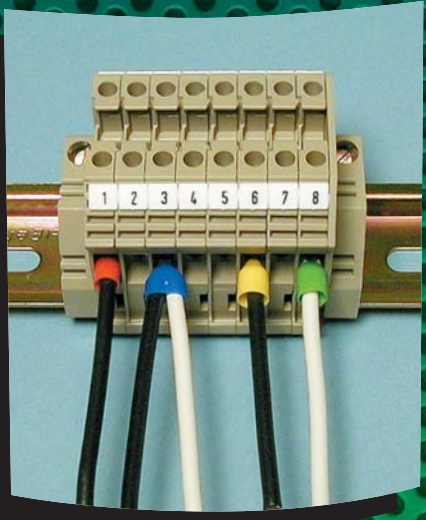
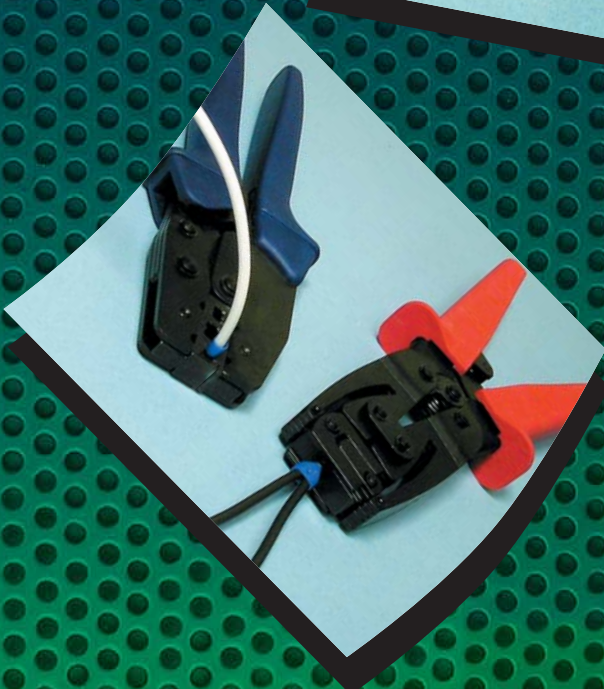


FERRULES & CRIMPING TOOLS

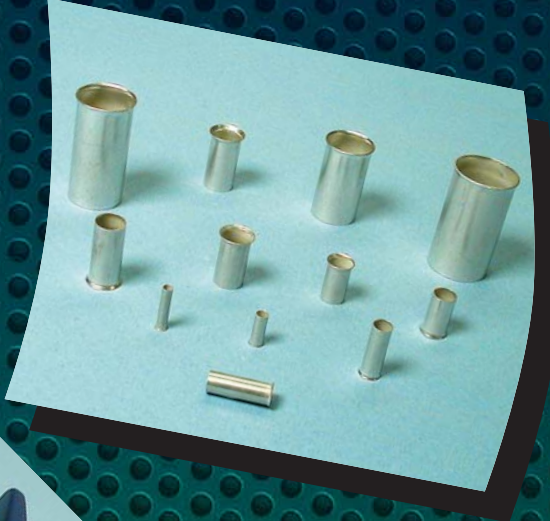

INSULATED FERRULES CONTA-CLIP STANDARD



CONTA-CLIP Ferrules increase connection reliability when terminating stranded wire in terminal blocks, control components and equipment and devices.

They prevent strand separation while minimizing strand breakage due to stress, bending, or vibration. Insulated ferrules provide additional electric isolation between adjacent terminations and facilitate wire insertion. Choose from Insulated, Single and Dual Wire Ferrules and Uninsulated Ferrules for conductor sizes from 26AWG up to 250MCM.

Materials

Insulated Ferrules
Sleeve: Polypropylene (Rated Temperature up to 105°C, (302°F).

Tube: Tin Plated Copper.

Uninsulated Ferrules

Tube: Tin Plated Copper


Standard Packs

Ferrules are offered in two Standard Pack sizes where indicated. Add/100 to the Cat.No. for Standard Pack of 100.

Example: 2620.0/100


	AWG (mm ²)	Color	Cat. No.	Type	Dimensions: mm(in.)				Stripping Length mm(in.)	Std. Pack
					A	B	C	D		
	24-26(.25)	Lt.Blue	2620.0	HO.25/10	10.0(.39)	6.0(.24)	.85(.03)	1.8(.07)	8.0(.31)	500/100
	24-26(.25)	Lt.Blue	2621.0	HO.25/12	12.0(.47)	8.0(.31)	.85(.03)	1.8(.07)	10.0(.39)	500/100
	22-24(.34)	Turquoise	2622.0	HO.34/10	10.0(.39)	6.0(.24)	.85(.03)	2.0(.08)	8.0(.31)	500/100
	22-24(.34)	Turquoise	2623.0	HO.34/12	12.0(.47)	8.0(.31)	.85(.03)	2.0(.08)	10.0(.39)	500/100
	20-22(.50)	Orange	2397.0	HO.5/12	12.0(.47)	6.0(.24)	1.0(.24)	2.6(.10)	8.0(.31)	500/100
	20-22(.50)	Orange	2201.0	HO.5/14	14.0(.55)	8.0(.31)	1.0(.04)	2.6(.10)	10.0(.39)	500/100
	20-22(.50)	Orange	3116.0	HO.5/16	16.0(.63)	10.0(.39)	1.0(.04)	2.6(.10)	12.0(.47)	500/100
	18-20(.75)	White	2398.0	HO.75/12	12.0(.47)	6.0(.24)	1.2(.05)	2.8(.11)	8.0(.31)	500/100
	18-20(.75)	White	2202.0	HO.75/14	14.0(.55)	8.0(.31)	1.2(.05)	2.8(.11)	10.0(.39)	500/100
	18-20(.75)	White	3117.0	HO.75/16	16.0(.63)	10.0(.39)	1.2(.05)	2.8(.11)	12.0(.47)	500/100
	18-20(.75)	White	3118.0	HO.75/18	18.0(.71)	12.0(.47)	1.2(.05)	2.8(.11)	14.0(.55)	500/100
	18(1.0)	Yellow	2399.0	H1.0/12	12.0(.47)	6.0(.24)	1.4(.06)	3.0(.12)	8.0(.31)	500/100
	18(1.0)	Yellow	2203.0	H1.0/14	14.0(.55)	8.0(.31)	1.4(.06)	3.0(.12)	10.0(.39)	500/100
	18(1.0)	Yellow	3119.0	H1.0/16	16.0(.63)	10.0(.39)	1.4(.06)	3.0(.12)	12.0(.47)	500/100
	18(1.0)	Yellow	3120.0	H1.0/18	18.0(.71)	12.0(.47)	1.4(.06)	3.0(.12)	15.0(.59)	500/100
	16(1.5)	Red	2204.0	H1.5/14	14.0(.55)	8.0(.31)	1.7(.07)	3.5(.14)	10.0(.39)	500/100
	16(1.5)	Red	2400.0	H1.5/16	16.0(.63)	10.0(.39)	1.7(.07)	3.5(.14)	12.0(.47)	500/100
	16(1.5)	Red	2205.0	H1.5/24	24.0(.94)	18.0(.71)	1.7(.07)	3.5(.14)	20.0(.78)	500/100
	14(2.5)	Blue	2845.0	H2.5/15-D	15.0(.59)	8.0(.31)	2.2(.08)	4.2(.17)	10.0(.39)	500/100
	14(2.5)	Blue	2846.0	H2.5/19-D	19.0(.75)	12.0(.47)	2.2(.08)	4.2(.17)	14.0(.55)	500/100
	14(2.5)	Blue	2847.0	H2.5/25-D	25.0(.98)	18.0(.71)	2.2(.08)	4.2(.17)	20.0(.78)	500/100
	12(4.0)	Gray	2848.0	H4.0/18-D	18.0(.71)	10.0(.39)	2.8(.11)	4.8(.19)	12.0(.47)	500/100
	12(4.0)	Gray	2849.0	H4.0/20-D	20.0(.78)	12.0(.47)	2.8(.11)	4.8(.19)	14.0(.55)	500/100
	12(4.0)	Gray	2850.0	H4.0/26-D	26.0(1.02)	18.0(.71)	2.8(.11)	4.8(.19)	20.0(.78)	100
	10(6.0)	Black	2210.0	H6.0/20	20.0(.78)	12.0(.47)	3.5(.14)	6.3(.25)	14.0(.55)	100
	10(6.0)	Black	2211.0	H6.0/26	26.0(1.02)	18.0(.71)	3.5(.14)	6.3(.25)	20.0(.78)	100
	8(10.0)	Ivory	2212.0	H10.0/22	22.0(.86)	12.0(.47)	4.5(.18)	7.6(.30)	15.0(.59)	100
	8(10.0)	Ivory	2213.0	H10.0/28	28.0(1.10)	18.0(.71)	4.5(.18)	7.6(.30)	21.0(.83)	100
	6(16.0)	Green	2214.0	H16.0/24	22.0(.86)	12.0(.47)	5.8(.23)	8.8(.35)	15.0(.59)	100
	6(16.0)	Green	2215.0	H16.0/28	28.0(1.10)	18.0(.71)	5.8(.23)	8.8(.35)	21.0(.83)	100
	4(25.0)	Brown	2267.0	H25.0/30	30.0(1.18)	16.0(.63)	7.3(.29)	11.2(.44)	18.0(.71)	50
	4(25.0)	Brown	2272.0	H25.0/36	36.0(1.42)	22.0(.86)	7.3(.29)	11.2(.44)	24.0(.94)	50
	2(35.0)	Beige	2276.0	H35.0/30	30.0(1.18)	16.0(.63)	8.3(.33)	12.7(.50)	19.0(.75)	50
	2(35.0)	Beige	2390.0	H35.0/39	39.0(1.53)	25.0(.98)	8.3(.33)	12.7(.50)	28.0(1.10)	50
	1(50.0)	Olive	2500.0	H50.0/36	36.0(1.42)	20.0(.78)	10.3(.40)	15.0(.59)	26.0(1.02)	50
	2/0(70.0)	Yellow	2786.0	H70.0/37	37.0(1.45)	22.0(.86)	12.7(.50)	16.0(.63)	26.0(1.02)	25
	3/0(70.0)	Red	2787.0	H95.0/44	44.0(1.73)	25.0(.98)	14.7(.58)	18.0(.71)	31.0(1.22)	25
	4/0(120.0)	Blue	2788.0	H120.0/50	50.0(1.97)	30.0(1.18)	16.5(.65)	21.0(.83)	36.0(1.43)	25
	250(150.0) MCM	Yellow	2789.0	H150.0/54	54.0(2.12)	32.0(1.26)	18.5(.73)	23.5(.92)	38.0(1.439)	25

DUAL FERRULES FOR TWO CONDUCTORS




AWG (mm ²)	Color	Cat. No.	Type	Dimensions: mm(in.)					Stripping Length mm(in.)	Std. Pack
				A	B	C	D	F		
2x22(2x.05)	Orange	3003.0	HZL/0.5	14.5(.55)	8.0(.31)	1.4(.06)	5.0(.20)	3.0(.12)	11.0(.43)	500/100
2x22(2x.05)	White	2794.0	HZL/0.5-D							
2x22(2x.05)	Orange	3004.0	HZL/0.5 HL	16.0(.63)	10.0(.39)	1.4(.06)	5.0(.20)	3.0(.12)	13.0(.51)	500/100
2x22(2x.05)	White	2993.0	HZL/0.5HL-D							
2x22(2x.05)	Orange	3005.0	HZL/0.5L	18.0(.71)	12.0(.47)	1.4(.06)	5.0(.20)	3.0(.12)	15.0(.59)	500/100
2x22(2x.05)	White	2994.0	HZL/0.5L-D							
2x20(2x.75)	White	3006.0	HZL/0.75	14.0(.55)	8.0(.31)	1.7(.07)	5.5(.22)	3.0(.12)	11.0(.43)	500/100
2x20(2x.75)	Gray	2775.0	HZL/0.75-D							
2x20(2x.75)	Lt. Blue	3029.0	HZL/0.75-T							
2x20(2x.75)	White	3007.0	HZL/0.75HL	16.0(.63)	10.0(.39)	1.7(.07)	5.5(.22)	3.0(.12)	13.0(.51)	500/100
2x20(2x.75)	Gray	2795.0	HZL/0.75HL-D							
2x20(2x.75)	Lt. Blue	3030.0	HZL/0.75HL-T							
2x20(2x.75)	White	3008.0	HZL/0.75L	24.0(.94)	18.0(.71)	1.7(.07)	5.5(.22)	3.0(.12)	21.0(.83)	500/100
2x20(2x.75)	Gray	2995.0	HZL/0.75L-D							
2x20(2x.75)	Lt. Blue	3031.0	HZL/0.75L-T							
2x18(2x1.0)	Yellow	3009.0	HZL/1.0	15.0(.59)	8.0(.31)	2.0(.08)	5.8(.23)	3.2(.13)	12.0(.47)	500/100
2x18(2x1.0)	Red	2776.0	HZL/1.0-D							
2x18(2x1.0)	Yellow	3010.0	HZL/1.0HL	19.0(.75)	12.0(.47)	2.0(.08)	5.8(.23)	3.2(.13)	16.0(.63)	500/100
2x18(2x1.0)	Red	2796.0	HZL/1.0HL-D							
2x18(2x1.0)	Yellow	3011.0	HZL/1.0L	25.0(.98)	18.0(.71)	2.0(.08)	5.8(.23)	3.2(.13)	22.0(.87)	500/100
2x18(2x1.0)	Red	2996.0	HZL/1.0L-D							
2x16(2x1.5)	Red	3012.0	HZL/1.5	16.0(.63)	8.0(.31)	2.2(.09)	6.5(.26)	3.6(.14)	11.0(.43)	500/100
2x16(2x1.5)	Black	2777.0	HZL/1.5-D							
2x16(2x1.5)	Red	3013.0	HZL/1.5HL	20.0(.79)	12.0(.47)	2.2(.09)	6.5(.26)	3.6(.14)	15.0(.59)	500/100
2x16(2x1.5)	Black	2797.0	HZL/1.5HL-D							
2x16(2x1.5)	Red	3014.0	HZL/1.5L	26.0(1.02)	18.0(.71)	2.2(.09)	6.5(.26)	3.6(.14)	21.0(.83)	500/100
2x16(2x1.5)	Black	2997.0	HZL/1.5L-D							
2x14(2x2.5)	Blue	2778.0	HZL/2.5-D	19.0(.75)	10.0(.39)	2.8(.11)	8.0(.31)	4.5(.18)	13.0(.51)	500/100
2x14(2x2.5)	Gray	3038.0	HZL/2.5-T							
2x14(2x2.5)	Blue	2798.0	HZL/2.5HL-D	21.0(.83)	12.0(.47)	2.8(.11)	8.0(.31)	4.5(.18)	15.0(.59)	500/100
2x14(2x2.5)	Gray	3039.0	HZL/2.5HL-T							
2x14(2x2.5)	Blue	2998.0	HZL/2.5L-D	27.0(1.06)	18.0(.71)	2.8(.11)	8.0(.31)	4.5(.18)	21.0(.83)	500/100
2x14(2x2.5)	Gray	3040.0	HZL/2.5L-T							
2x12(2x4.0)	Gray	2799.0	HZL/4.0-D	22.0(.87)	12.0(.47)	3.5(.14)	9.0(.35)	5.2(.20)	15.0(.59)	100
2x12(2x4.0)	Orange	3041.0	HZL/4.0-T							
2x12(2x4.0)	Gray	2999.0	HZL/4.0L-D	28.0(1.10)	18.0(.71)	3.5(.14)	9.0(.35)	5.2(.20)	21.0(.83)	100
2x12(2x4.0)	Orange	3042.0	HZL/4.0L-T							
2x10(2x6.0)	Black	3020.0	HZL/6.0	23.0(.91)	12.0(.47)	4.5(.18)	11.4(.45)	6.2(.24)	20.0(.79)	100
2x10(2x6.0)	Yellow	2800.0	HZL/6.0-D							
2x10(2x6.0)	Green	3043.0	HZL/6.0-T							
2x10(2x6.0)	Black	3021.0	HZL/6.0L	29.0(1.14)	18.0(.71)	4.5(.18)	11.4(.45)	6.2(.24)	24.0(.94)	100
2x10(2x6.0)	Yellow	3000.0	HZL/6.0L-D							
2x10(2x6.0)	Green	3044.0	HZL/6.0L-T							
2x8(2x10.0)	Ivory	3022.0	HZL/10.0	24.0(.94)	12.0(.47)	5.8(.23)	13.4(.53)	7.6(.30)	17.0(.67)	100
2x8(2x10.0)	Red	2801.0	HZL/10.0-D							
2x8(2x10.0)	Brown	3045.0	HZL/10.0-T							
2x8(2x10.0)	Ivory	3023.0	HZL/10.0L	30.0(1.18)	1.0(.71)	5.8(.23)	13.4(.53)	7.6(.30)	23.0(.91)	100
2x8(2x10.0)	Red	3001.0	HZL/10.0L-D							
2x8(2x10.0)	Brown	3046.0	HZL/10.0L-T							
2x6(2x16.0)	Green	3024.0	HZL/16.0	29.0(1.14)	16.0(.63)	8.3(.33)	17.2(.68)	9.5(.37)	20.0(.79)	100
2x6(2x16.0)	Blue	2802.0	HZL/16.0-D							
2x6(2x16.0)	White	3047.0	HZL/16.0-T							
2x6(2x16.0)	Green	3025.0	HZL/16.0-L	38.0(1.50)	25.0(.98)	8.3(.33)	17.2(.68)	9.5(.37)	29.0(1.14)	100
2x6(2x16.0)	Blue	3002.0	HZL/16.0L-D							
2x6(2x16.0)	White	3048.0	HZL/16.0L-T							

INSULATED FERRULES DIN-STANDARD




AWG (mm ²)	Color	Cat. No.	Type	Dimensions: mm(in.)				Stripping Length mm(in.)	Std. Pack
				A	B	C	D		
20-22(.50)	White	2863.0	H0.5/12-D	12.0(.47)	6.0(.24)	1.0(.04)	2.6(.10)	8.0(.31)	500/100
20-22(.50)	White	2864.0	H0.5/14-D	14.0(.55)	8.0(.31)	1.0(.04)	2.6(.10)	10.0(.39)	500/100
20-22(.50)	White	2865.0	H0.5/16-D	16.0(.63)	10.0(.39)	1.0(.04)	2.6(.10)	12.0(.47)	500/100
18-20(.75)	Gray	2866.0	H0.75/12-D	12.0(.47)	6.0(.24)	1.2(.05)	2.8(.11)	8.0(.31)	500/100
18-20(.75)	Gray	2867.0	H0.75/14-D	14.0(.55)	8.0(.31)	1.2(.05)	2.8(.11)	10.0(.39)	500/100
18-20(.75)	Gray	2868.0	H0.75/16-D	16.0(.63)	10.0(.39)	1.2(.05)	2.8(.11)	12.0(.47)	500/100
18-20(.75)	Gray	2869.0	H0.75/18-D	18.0(.71)	12.0(.47)	1.2(.05)	2.8(.11)	14.0(.55)	500/100
18(1.0)	Red	2870.0	H1.0/12-D	12.0(.47)	6.0(.24)	1.4(.06)	3.0(.12)	8.0(.31)	500/100
18(1.0)	Red	2871.0	H1.0/14-D	14.0(.55)	8.0(.31)	1.4(.06)	3.0(.12)	10.0(.39)	500/100
18(1.0)	Red	2872.0	H1.0/16-D	16.0(.63)	10.0(.39)	1.4(.06)	3.0(.12)	12.0(.47)	500/100
18(1.0)	Red	2840.0	H1.0/18-D	18.0(.71)	12.0(.47)	1.4(.06)	3.0(.12)	15.0(.59)	500/100
16(1.5)	Black	2841.0	H1.5/14-D	14.0(.55)	8.0(.31)	1.7(.07)	3.5(.14)	10.0(.39)	500/100
16(1.5)	Black	2842.0	H1.5/16-D	16.0(.63)	10.0(.39)	1.7(.07)	3.5(.14)	12.0(.47)	500/100
16(1.5)	Black	2843.0	H1.5/18-D	18.0(.71)	12.0(.47)	1.7(.07)	3.5(.14)	15.0(.59)	500/100
16(1.5)	Black	2844.0	H1.5/24-D	24.0(.94)	18.0(.71)	1.7(.07)	3.5(.14)	20.0(.78)	500/100
14(2.5)	Blue	2845.0	H2.5/15-D	15.0(.59)	8.0(.31)	2.2(.08)	4.2(.17)	10.0(.39)	500/100
14(2.5)	Blue	2846.0	H2.5/19-D	19.0(.75)	12.0(.47)	2.2(.08)	4.2(.17)	14.0(.55)	500/10
14(2.5)	Blue	2847.0	H2.5/25-D	25.0(.98)	18.0(.71)	2.2(.08)	4.2(.17)	20.0(.78)	500/10
12(4.0)	Gray	2848.0	H4.0/17-D	17.0(.67)	10.0(.39)	2.8(.11)	4.8(.19)	12.0(.47)	500/100
12(4.0)	Gray	2849.0	H4.0/19-D	19.0(.75)	12.0(.47)	2.8(.11)	4.8(.19)	14.0(.55)	500/100
12(4.0)	Gray	2850.0	H4.0/26-D	26.0(1.02)	18.0(.71)	2.8(.11)	4.8(.19)	20.0(.78)	100
10(6.0)	Yellow	2851.0	H6.0/20-D	20.0(.78)	12.0(.47)	3.5(.14)	6.3(.25)	14.0(.55)	100
10(6.0)	Yellow	2852.0	H6.0/26-D	26.0(1.02)	18.0(.71)	3.5(.14)	6.3(.25)	20.0(.78)	100
8(10.0)	Red	2853.0	H10.0/22-D	22.0(.86)	12.0(.47)	4.5(.18)	7.6(.30)	15.0(.59)	100
8(10.0)	Red	2854.0	H10.0/28-D	28.0(1.10)	18.0(.71)	4.5(.18)	7.6(.30)	21.0(.83)	100
6(16.0)	Blue	2855.0	H16.0/24-D	22.0(.86)	12.0(.47)	5.8(.23)	8.8(.35)	15.0(.59)	100
6(16.0)	Blue	2856.0	H16.0/28-D	28.0(1.10)	18.0(.71)	5.8(.23)	8.8(.35)	21.0(.83)	100
4(25.0)	Yellow	2857.0	H25.0/30-D	30.0(1.18)	16.0(.63)	7.3(.29)	11.2(.44)	18.0(.71)	50
4(25.0)	Yellow	2858.0	H25.0/36-D	36.0(1.42)	22.0(.86)	7.3(.29)	11.2(.44)	24.0(.94)	50
2(35.0)	Red	2859.0	H35.0/30-D	30.0(1.18)	16.0(.63)	8.3(.33)	12.7(.50)	19.0(.75)	50
2(35.0)	Red	3121.0	H35.0/30-D	30.0(1.18)	18.0(.71)	8.3(.33)	12.7(.50)	21.0(.83)	50
2(35.0)	Red	2860.0	H35.0/39-D	39.0(1.53)	25.0(.98)	8.3(.33)	12.7(.50)	28.0(1.10)	50
1(50.0)	Blue	2861.0	H50.0/36-D	36.0(1.42)	20.0(.78)	10.3(.40)	15.0(.59)	26.0(1.02)	50
1(50.0)	Blue	3122.0	H50.0/40-D	40.0(1.57)	25.0(.98)	10.3(.40)	15.0(.59)	31.0(1.22)	50

INSULATED FERRULES T-STANDARD



AWG (mm ²)	Color	Cat. No.	Type	Dimensions: mm(in.)				Stripping Length mm(in.)	Std. Pack
				A	B	C	D		
24-26(.25)	Yellow	3123.0	H0.25/10-T	10.0(.39)	6.0(.24)	.85(.03)	1.8(.07)	8.0(.31)	500/100
24-26(.25)	Yellow	3124.0	H0.25/12-T	12.0(.47)	8.0(.31)	.85(.03)	1.8(.07)	10.0(.39)	500/100
22-24(.34)	Green	3125.0	H0.34/10-T	10.0(.39)	6.0(.24)	.85(.03)	2.0(.08)	8.0(.31)	500/100
22-24(.34)	Green	3126.0	H0.34/12-T	12.0(.47)	8.0(.31)	.85(.03)	2.0(.08)	10.0(.39)	500/100
20-22(.50)	White	2863.0	H0.5/12-D	12.0(.47)	6.0(.24)	1.0(.04)	2.6(.10)	8.0(.31)	500/100
20-22(.50)	White	2864.0	H0.5/14-D	14.0(.55)	8.0(.31)	1.0(.04)	2.6(.10)	10.0(.39)	500/100
20-22(.50)	White	2865.0	H0.5/16-D	16.0(.63)	10.0(.39)	1.0(.04)	2.6(.10)	12.0(.47)	500/10
18-20(.75)	Blue	3127.0	H0.75/12-T	12.0(.47)	6.0(.24)	1.2(.05)	2.8(.11)	8.0(.31)	500/100
18-20(.75)	Blue	1059.0	H0.75/14-T	14.0(.55)	8.0(.31)	1.2(.05)	2.8(.11)	10.0(.39)	500/100
18-20(.75)	Blue	3128.0	H0.75/16-T	16.0(.63)	10.0(.39)	1.2(.05)	2.8(.11)	12.0(.47)	500/100
18-20(.75)	Blue	3129.0	H0.75/18-T	18.0(.71)	12.0(.47)	1.2(.05)	2.8(.11)	14.0(.55)	500/100
18(1.0)	Red	2870.0	H1.0/12-D	12.0(.47)	6.0(.24)	1.4(.06)	3.0(.12)	8.0(.31)	500/100
18(1.0)	Red	2871.0	H1.0/14-D	14.0(.55)	8.0(.31)	1.4(.06)	3.0(.12)	10.0(.39)	500/100
18(1.0)	Red	2872.0	H1.0/16-D	16.0(.63)	10.0(.39)	1.4(.06)	3.0(.12)	12.0(.47)	500/100
18(1.0)	Red	2840.0	H1.0/18-D	18.0(.71)	12.0(.47)	1.4(.06)	3.0(.12)	15.0(.59)	500/100
16(1.5)	Black	2841.0	H1.5/14-D	14.0(.55)	8.0(.31)	1.7(.07)	3.5(.14)	10.0(.39)	500/100
16(1.5)	Black	2842.0	H1.5/16-D	16.0(.63)	10.0(.39)	1.7(.07)	3.5(.14)	12.0(.47)	500/100
16(1.5)	Black	2843.0	H1.5/18-D	18.0(.71)	12.0(.47)	1.7(.07)	3.5(.14)	15.0(.59)	500/100
16(1.5)	Black	2844.0	H1.5/24-D	24.0(.94)	18.0(.71)	1.7(.07)	3.5(.14)	20.0(.78)	500/100
14(2.5)	Gray	1069.0	H2.5/14-T	14.0(.55)	8.0(.31)	2.2(.08)	4.2(.17)	10.0(.39)	500/100
14(2.5)	Gray	3130.0	H2.5/18-T	18.0(.71)	12.0(.47)	2.2(.08)	4.2(.17)	14.0(.55)	500/100
14(2.5)	Gray	1089.0	H2.5/24-T	24.0(.94)	18.0(.71)	2.2(.08)	4.2(.17)	20.0(.78)	500/100
12(4.0)	Orange	2041.0	H4.0/18-T	18.0(.71)	10.0(.39)	2.8(.11)	4.8(.19)	12.0(.47)	500/100
12(4.0)	Orange	3131.0	H4.0/20-T	20.0(.78)	12.0(.47)	2.8(.11)	4.8(.19)	14.0(.55)	500/100
12(4.0)	Orange	2073.0	H4.0/26-T	26.0(1.02)	18.0(.71)	2.8(.11)	4.8(.19)	20.0(.78)	100
10(6.0)	Green	2130.0	H6.0/20-T	20.0(.78)	12.0(.47)	3.5(.14)	6.3(.25)	14.0(.55)	100
10(6.0)	Green	2133.0	H6.0/26-T	26.0(1.02)	18.0(.71)	3.5(.14)	6.3(.25)	20.0(.78)	100
8(10.0)	Brown	2134.0	H10.0/22-T	22.0(.86)	12.0(.47)	4.5(.18)	7.6(.30)	15.0(.59)	100
8(10.0)	Brown	2144.0	H10.0/28-T	28.0(1.10)	18.0(.71)	4.5(.18)	7.6(.30)	21.0(.83)	100
6(16.0)	Ivory	2145.0	H16.0/24-T	22.0(.86)	12.0(.47)	5.8(.23)	8.8(.35)	15.0(.59)	100
6(16.0)	Ivory	2510.0	H16.0/28-T	28.0(1.10)	18.0(.71)	5.8(.23)	8.8(.35)	21.0(.83)	100
4(25.0)	Black	2511.0	H25.0/30-T	30.0(1.18)	16.0(.63)	7.3(.29)	11.2(.44)	18.0(.71)	50
4(25.0)	Black	3132.0	H25.0/36-T	36.0(1.42)	22.0(.86)	7.3(.29)	11.2(.44)	24.0(.94)	50

UNINSULATED FERRULES



AWG (mm ²)	Cat. No.	Type	Dimensions: mm(in.)			Stripping Length mm(in.)	Std. Pack
			A	B	C		
24(.25)	3096.0	H0.25/5	5.0(.20)	.75(.03)	1.7(.07)	5.0(.20)	1000/100
20(.50)	2216.0	H0.5/6	6.0(.24)	1.0(.04)	2.1(.08)	6.0(.24)	1000/100
20(.50)	3097.0	H0.5/10	10.0(.39)	1.0(.04)	2.1(.08)	10.0(.39)	1000/100
20(.75)	2217.0	H0.75/6	6.0(.24)	1.2(.05)	2.3(.09)	6.0(.24)	1000/100
20(.75)	2218.0	H0.75/10	10.0(.39)	1.2(.05)	2.3(.09)	10.0(.39)	1000/100
20(1.0)	2219.0	H1.0/6	6.0(.24)	1.4(.06)	2.5(.10)	6.0(.24)	1000/100
20(1.0)	2220.0	H1.0/10	10.0(.39)	1.4(.06)	2.5(.10)	10.0(.39)	1000/100
16(1.5)	2221.0	H1.5/7	7.0(.28)	1.8(.07)	2.8(.11)	7.0(.28)	1000/100
16(1.5)	2222.0	H1.5/10	10.0(.39)	1.8(.07)	2.8(.11)	10.0(.39)	1000/100
16(1.5)	3098.0	H1.5/12	12.0(.47)	1.8(.07)	2.8(.11)	12.0(.47)	1000/100
16(1.5)	3099.0	H1.5/18	18.0(.71)	1.8(.07)	2.8(.11)	18.0(.71)	1000/100
14(2.5)	2223.0	H2.5/7	7.0(.28)	2.2(.08)	3.4(.13)	7.0(.28)	1000/100
14(2.5)	3100.0	H2.5/10	10.0(.39)	2.2(.08)	3.4(.13)	10.0(.39)	1000/100
14(2.5)	2224.0	H2.5/12	12.0(.47)	2.2(.08)	3.4(.13)	12.0(.47)	1000/100
14(2.5)	3101.0	H2.5/18	18.0(.71)	2.2(.08)	3.4(.13)	18.0(.71)	1000/100
12(4.0)	2225.0	H4.0/9	9.0(.35)	2.8(.11)	4.0(.16)	9.0(.35)	1000/100
12(4.0)	2226.0	H4.0/12	12.0(.47)	2.8(.11)	4.0(.16)	12.0(.47)	1000/100
12(4.0)	3102.0	H4.0/15	15.0(.59)	2.8(.11)	4.0(.16)	15.0(.59)	1000/100
12(4.0)	3103.0	H4.0/18	18.0(.71)	2.8(.11)	4.0(.16)	18.0(.71)	1000/100
10(6.0)	2227.0	H6.0/12	12.0(.47)	3.5(.14)	4.7(.18)	12.0(.47)	500/100
10(6.0)	2388.0	H6.0/15	15.0(.59)	3.5(.14)	4.7(.18)	15.0(.59)	500/100
10(6.0)	3104.0	H6.0/15	15.0(.59)	3.5(.14)	4.7(.18)	15.0(.59)	500/100
10(6.0)	3105.0	H6.0/18	18.0(.71)	3.5(.14)	4.7(.18)	18.0(.71)	500/100
8(10.0)	2228.0	H10.0/12	12.0(.47)	4.5(.18)	5.8(.23)	12.0(.47)	500/100
8(10.0)	2389.0	H10.0/15	15.0(.59)	4.5(.18)	5.8(.23)	15.0(.59)	500/100
8(10.0)	2229.0	H10.0/18	18.0(.71)	4.5(.18)	5.8(.23)	18.0(.71)	500/100
6(16.0)	2391.0	H16.0/12	12.0(.47)	5.8(.23)	7.5(.29)	12.0(.47)	500/100
6(16.0)	2392.0	H16.0/15	15.0(.59)	5.8(.23)	7.5(.29)	15.0(.59)	500/100
6(16.0)	2393.0	H16.0/18	18.0(.71)	5.8(.23)	7.5(.29)	18.0(.71)	500/100
6(16.0)	3106.0	H16.0/25	25.0(.98)	5.8(.23)	7.5(.29)	25.0(.98)	500/100
6(16.0)	3107.0	H16.0/32	32.0(1.26)	5.8(.23)	7.5(.29)	32.0(1.26)	500/100
4(25.0)	2394.0	H25.0/15	15.0(.59)	7.3(.29)	9.5(.37)	15.0(.59)	500/100
4(25.0)	2395.0	H25.0/18	18.0(.71)	7.3(.29)	9.5(.37)	18.0(.71)	500/100
4(25.0)	3108.0	H25.0/25	25.0(.98)	7.3(.29)	9.5(.37)	25.0(.98)	500/100
4(25.0)	3109.0	H25.0/32	32.0(1.26)	7.3(.29)	9.5(.37)	32.0(1.26)	500/100
2(35.0)	2396.0	H35.0/18	18.0(.71)	8.3(.33)	11.0		

FERRULE ASSORTMENT BOXES – DIN STANDARD

Assortment Boxes provide storage and easy dispensing of Ferrules for service and maintenance applications.

Ferrule Box LD:

Fill the box with your own assortment.
Ferrule sizes 20-6 AWG

Ferrule Box CC-1:

Factory filled with insulated Ferrules sizes 20-14 AWG

Ferrule Box CC-2:

Factory filled with insulated Ferrules sizes 12-6 AWG



**Ferrule Box LD
Empty
Cat.No. 2887.0**



**Ferrule Box CC-1
AWG 20 to 14
Cat.No. 2884.0**



**Ferrule Box CC-2
AWG 12 to 16
Cat.No. 2885.0**

Contact Conta-Clip, Inc. for other color standard assortment Boxes

AWG	Color	Type	Qty.
20	White	H0.5/14-D	50
18	Gray	H0.75/14-D	100
18	Red	H1.0/14-D	100
16	Black	H1.5/14-D	100
14	Blue	H2.5/15D	50

AWG	Color	Type	Qty.
12	Gray	H4.0/17-D	50
10	Yellow	H6.0/20-D	20
8	Red	H10.0/22-D	20
6	Blue	H16.0/24-D	10

Conta-Clip Ferrule Crimpers are used to mechanically crimp Insulated and Uninsulated Ferrules onto wires and cables. They are manufactured to exacting specifications ensuring the best possible connection between the Ferrule and conductor.

Choose from Front or Side wire Entry Crimpers with one or individual crimp cavities.

- Positive ratcheting with emergency release
- Provide maximum crimp force with reasonable hand pressure
- Designed to reduce hand stress
- Featuring hardened dies and steel frames (PZU4 plastic frame)

FERRULE CRIMPING TOOLS

**PZU 4
Front/Side Wire Entry**




**Single Crimp Cavity
Cat. No: 1464.0
AWG Wire Size: 20-12
mm² Ferrule Size: .5-4.0**

**PZU S
Side Wire Entry**



**Multiple Crimp Cavities
Cat. No: 3055.0
AWG Wire Size: 26-10
mm² Ferrule Size: .14-6.0**

**PZU 6
Front Wire Entry**



**Single Crimp Cavity
Cat. No: 1100.0
AWG Wire Size: 26-10
mm² Ferrule Size: .14-6.0**

**PZU 16
Front Wire Entry**



**Single Crimp Cavity
Cat. No: 1465.0
AWG Wire Size: 8-6
mm² Ferrule Size: 10.0-16.0**

**PZU 25
Side Wire Entry**



**Multiple Crimp Cavities
Cat. No: 3057.0
AWG Wire Size: 8,6,4
mm² Ferrule Size: 10, 16, 25**

**PZU 35
Side Wire Entry**



**Multiple Crimp Cavities
Cat. No: 1466.0
AWG Wire Size: 4,2
mm² Ferrule Size: 25, 35**

**PZU 50
Side Wire Entry**




**Single Crimp Cavity
Cat. No: 1467.0
AWG Wire Size: 1/0
mm² Ferrule Size: 50**


**PZU 16/E
Side Wire Entry**



**Multiple Crimp Cavities
Cat. No: 3056.0
AWG Wire Size: 20-6
mm² Ferrule Size: 0.5-16.0**



Front Wire Entry



Side Wire Entry

Standard Pack is 1 for all Ferrule Boxes and Ferrule Crimpers