



Identification Products

ANSI/TIA/EIA 606-A Standard Labeling86-93
 Spirit® 2100 Portable Printing System94-97
 TagPrint™ 606 and PRO Softwares98-99
 Thermal Transfer Printers100
 ShrinkTrak™ Heat Shrinkable Markers101-103
 Miscellaneous Labeling104-108

ANSI/TIA/EIA-606-A REQUIREMENTS

The ANSI/TIA/EIA-606-A standard was developed to specify the requirements for labeling the telecommunications foundation in buildings. To help fulfill these requirements, HellermannTyton offers a complete identification product line, including the new Spirit® 2100 portable printing system, computer printable labels, TagPrint Pro™ labeling software, TagPrint 606™ software, and an extensive line of printers, markers, signs, and label books. These identification products are designed to bring label production “in-house” to help speed production, reduce errors, and lower installation costs. HellermannTyton offers labels that work with thermal transfer, laser, ink jet, or dot matrix printers. Use the charts on the following pages to select label solutions that meet the ANSI/TIA/EIA-606-A standard.



ANSI/TIA/EIA-606-A
Standard

“All labels should be of a size, color and contrast to be readily visible by those maintaining the system. Labels should be resistant to environmental conditions likely to be encountered where they are installed, such as moisture or heat, and should be designated to have a useful life equal to or greater than that of the component labeled.”

1. Select the chart listing the general application
2. Identify the type of printer
3. Find the specific label application

HellermannTyton Offers the Right Identifying Solution for Telecommunications Applications


PATCH PANEL, TELEPHONE, RACKS AND FACEPLATE LABELS



RACKS/RACEWAY/ PATHWAY LABELS




WIRE AND CABLE

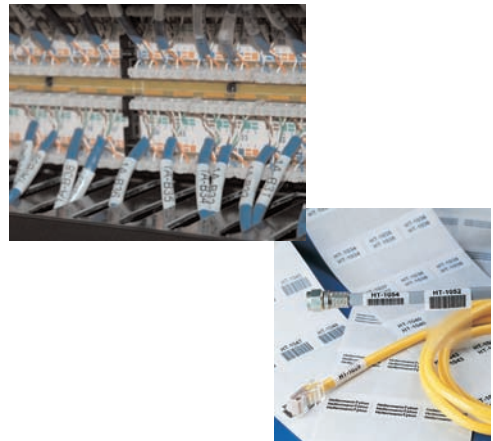

AND MANY MORE APPLICATIONS:

- Fiber Splice Enclosures
- Grounding and Bonding Fire Stopping Locations Racks/Raceway/Pathway
- Labels For Marking Flat Surfaces, Pathways, Racks, Busbars, Telecommunication spaces and Large Conduits



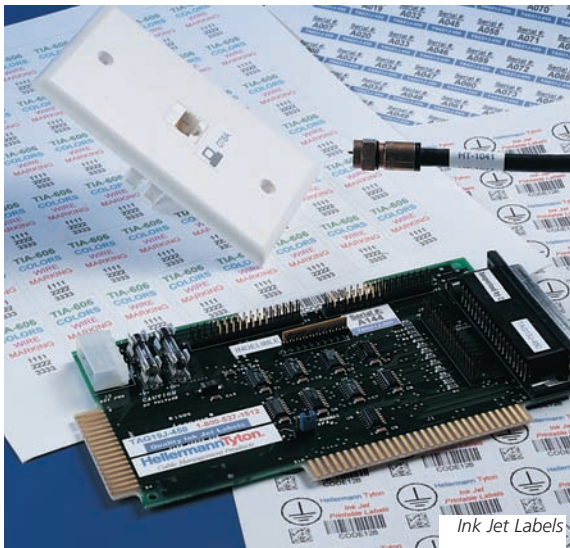

Ink Jet Labels

Thermal Transfer Labels

HellermannTyton offers thermal transfer labeling systems, including labels and printers, which print high density text. The series of thermal transfer labels are designed specifically for thermal transfer printers and provide a clean, non-smear mark. The Spirit portable labeling system also incorporates thermal transfer technology.

Laser Tag Labels

Laser Tag labels are durable, laser printable labels for applications requiring clear, crisp legibility. They are ideal for marking copper and fiber optic cables, as well as components. The labels come on 8.5"x11" sheets with specially designed adhesives and materials, ensuring the labels will not curl, change color or jam laser printers.



Laser Tag and Ink Jet Labels



Self-Laminating Thermal Transfer Labels

Ink Jet Labels

A series of technologically advanced labels for use on standard ink jet printers are available from HellermannTyton. The labels are offered in a wide range of materials and sizes. When used with pigment based inks, these ink jet labels offer superior, smear resistant marks that are chemical and solvent resistant. Colors can also be printed when used on a color ink jet printer. Ink jet labels are available in polyester or paper.

Dot Matrix Labels

HellermannTyton TabTags for dot matrix printers come on pin-fed, fan-folded sheets. TabTags are used to mark wire, cable and components.

Identification Products

Faceplates, Patch Panels, Patch Cords, Telephones and Racks



ANSI/TIA/EIA-606-A
Standard

"An identifier is associated with each element of a telecommunications infrastructure to be administered. A unique identifier, or a combination of identifiers constructed so as to uniquely refer to a particular element, serves as the key to finding the record of information related to that element."

Application Guide

Printer	Application	Part Number	Size (w x l)	Pkg. Qty.
Thermal Transfer Printing	Rapid Net Modular Panel, Front	TAG68T1-336 ②	3.8" X .275"	10000
	Rapid Net Modular Panel, Rear	TAG69T1-336 ②	2" X .275"	10000
	Faceplate - Port - Std. Flush / Furniture/ Modular	TAGPP1T6-822	.625" X .31"	1000
	Faceplate - Port - Std. Flush / Furniture / Modular (Clear)	TAGPP1T6-822C	.625" X .31"	1000
	Faceplate - Port - Std. Flush / Furniture / Modular (Clear)	TAG11T4-822C	.65" X .2"	5000
	Faceplate - Port - Std. Flush / Furniture / Modular	TAGPP2T6-822	.66" X .31"	5000
	Faceplate - Port - Std. Flush / Furniture / Modular	TAGPP2T6-822C	.66" X .31"	5000
	Faceplate Window - Modular	TAG86T2-PAP ①②	2" X .396"	1000
	Faceplate - Window - Shuttered / Duplex / Decorator	TAG96T1-336 ②	1.875" X .25"	5000
	Faceplate - Window - Identification	TAG74T2-PAP ①	1.75" X .375"	1000
	Patch Panel - Port - Identifier - (clear)	TAG15T3-822C	1" X .5"	10000
	Patch Panel - Port - Standard (4 or 6 ports)	TAG83T1-822	4" X .312"	5000
	Patch Panel - Port - Standard -6 port	TAGPP1T6-822	.625" X .31"	1000
	Patch Panel - Port - Standard -6 port (clear)	TAGPP1T6-822C	.625" X .31"	1000
	Patch Panel - PP110C6481U or PP1105E481U	TAGPP3T4-822 ②	.688" X .25"	1000
	Patch Panel - PP110C6481U or PP1105E481U (Clear)	TAGPP3T4-822C ②	.688" X .25"	1000
	Patch Panel Identifier	TAG70T12-822	.25" X .25"	10000
	Patch Panel Identifier	TAG71T5-822	.5" X .43"	10000
	Patch Panel - Avaya High Density	TAG85T1-PAP ①	3" X .5"	5000
	Patch Panel - Siemen 4 port	TAGPP1T4-822	.625" X .333"	10000
	Relay Rack Identifier	TAG72T1-822	2.75" X 1.25"	3000
	Relay Rack Identifier	TAG79T1-795	4" X 2"	500
Telephone Label	TAG74T2-PAP ①	1.75" X .375"	1000	
Telecommunications Room Label	TAG80T1-795	3" X .5"	500	
Spirit® Thermal Transfer Labels	Faceplate - Port - Std. Flush / Furniture/ Modular	TAGHPP-336	.625" X .31"	500
	Faceplate - Window - Identification	TAGH89-336	1.75" X .375"	500
	Faceplate - Window - Shuttered / Duplex / Decorator	TAGH96-336 ②	2" X .396"	500
	Faceplate - Window - Shuttered / Duplex / Decorator	TAGH97-336 ②	1.874" x .25"	750
	Patch Panel Identifier	TAGH15-336	1" X .5"	500
	Patch Panels - Port- Standard (4 or 6 ports)	TAGHTP-336	.33" X continuous	37 ft.
	Patch Panel Identifier	TAGH71-336	.5" X .43"	500
	Relay Rack Identifier	TAGH15-336	1" X .5"	500
	Relay Rack Identifier	TAGH73-336	2" X 1"	250
	Telephones - Number Identifier	TAGH89-336	1.75" X .375"	500
	HT Universal Faceplates, non-adhesive	TAGH98-336	1.9" X .375"	250
	Laser Printing	110 Blocks - Color	TAG110 ①	7.9" X .475"
Faceplate - Port - Std. Flush / Furniture / Modular		TAG11L-789	.65" X .50	5000
Faceplate - Port - Std. Flush / Furniture / Modular		TAGPP1-788	.625" X .31"	1000
Faceplate - Port - Std. Flush / Furniture/ Modular (Clear)		TAGPP1-788C	.625" X .31"	1000
Faceplate - Port - Std. Flush / Furniture / Modular		TAGPP2-788	.66" X .31	1000
Faceplate - Port - Std. Flush / Furniture / Modular (Clear)		TAGPP2-788C	.66" X .31	1000
Faceplate - Window - Shuttered / Duplex / Decorator		TAG96L-789 ②	1.875" X .25"	1000
Faceplate Window - Modular		PHONETAG ①②	2" X .396"	1000
Patch Panels - AlphaSnap		TAGPP11010 ①②	.315" X 8.812"	1000
Patch Panels - Port - Standard -6 port		TAGPP1-788	.625" X .31"	1000
Patch Panels - Port - Standard -6 port (clear)		TAGPP1-788C	.625" X .31"	1000
Telephone ID label		TAGPHONE ①	1.75" X .375"	1000
Telephone Label		TAG62L-788	1.5" X .37"	1000
Patch Panel (Amp, ICC, Homaco Hyperlink)		TAG66L-789	3.6" X .375"	1000
Lucent Siemen mod-tap, Leviton Patch Panels		TAG67L-789	2.875" X .375"	1000
Rapid Net Modular Panel, Rear		TAG68T1-789 ①	2" X .275"	5000
Rapid Net Modular Panel, Front		TAG69T1-789 ②	3.8" X .275"	2500
Dot Matrix Printing		110 blocks in colors	TAG110 ①	7.9" X .475"
	Faceplate - Port - Std. Flush / Furniture / Modular	TAG11-400	.65" X .2"	5000
	Patch Panel Identifier	TAG18-400	.5" X .437"	5000
Ink Jet Printing	Patch Panel - Alpha Snap	TAGPP11010	.315 x 8.812	1000
	110 Blocks - Color	TAG110 ①	7.9" X .475"	1000
	Faceplate - Port - Std. Flush / Furniture/ Modular	TAGPP1J-108	.625" X .31"	1000
	Patch Panel - Port - Standard - 6 port	TAGPP1J-108	.625" X .31"	1000
	Telephone Label	TAGPHONE ①	1.75" X .375"	1000
	Telephone Label	PHONETAG ①	2" X .396"	1000

① Non-adhesive label ② For HellermannTyton specific products

Grounding and Bonding Fire Stopping Locations Racks/Raceway/Pathway

ANSI/TIA/EIA-606-A
Standard

"The Telecommunications main grounding busbar shall be labeled with the TMGB identifier.

The Telecommunications Grounding busbar shall be labeled with the TGB identifier. Each Firestopping location shall be labeled at each location where firestopping is installed, on each side of the penetrated fire barrier, within 300mm (12 in) of the firestopping material.

Application Guide

Printer	Part No.	Application (s)	Size (w x l)	Pkg. Qty.
Thermal Transfer Printing	TAG72T1-822	For	2.75" X 1.25"	3000
	TAG73T1-822	Flat	2" X 1"	3000
	TAG75T1-822	Surfaces	2" X .625"	2000
	TFOT-1	Only	1" X 54ft.	54 ft.
	GWT003X2	Non-adhesive Tags	3" X 1.5"	25
	GWC003X2	Non-adhesive Tags	3" X 1.5"	25
Thermal Transfer Printing Spirit® 2100 Portable Printing System	TAGH73-336		2" X 1"	250
	TAGH73-3364 *	For Flat	2" X 1"	250
	TAGH27-336	Surfaces	1.5" X .75"	500
	TAGH27-799	Only	1.5" X .75"	500
	TAGH75-336		2" X .625"	500
	TAGH75-3364 *		2" X .625"	500
Laser Printing	TAG59L-788	For Flat	4" X 1.5"	3500
	TAG60L-788	Surfaces	2.83" X 1.5"	5250
	TAG61L-788	Only	2.62" X 1"	7500
	TAG27T1-822		1.5" X .75"	3000
Dot Matrix Printing	TAG27-400	For Flat	1.5" X .75"	5000
	TAG44-400	Surfaces	1.87" X 1.87"	5000
	TAG45-400	Only	4" X .80"	5000
Ink Jet Printing	TAG65J-108	For Flat Surfaces	1.5" X 1"	12500
	TAG59J-108	Only	4" X 1.5"	3500
Manual Printing or Pre-Printed	TFOT-1		1" X 54 ft.	54 ft.
	GWT003X2	Non-adhesive Tags	3" X 1.5"	25
	GWC003X2	Non-adhesive Tags	3" X 1.5"	25

* a= length of write on area, b = length of label ** yellow



ANSI/TIA/EIA-606-A
Standard

"Pathways shall be labeled at all endpoints located in telecommunications spaces, equipment rooms, or entrance facilities. Additional labeling may be desirable at intermediate locations, or regularly spaced throughout the length of the pathway."

Marking Flat Surfaces, Pathways, Racks, Busbars, Telecommunications Spaces and Large Conduits

Application Guide

Printer	Part Number	Application(s)/ Material	Size (w x l)	Pkg. Qty.
Thermal Transfer Printing	TAG27T1-822	Ladder Rack/Conduit/Busbar	1.5" x .75"	3,000
	TAG73T1-822	Ladder Rack/Conduit/Busbar	2" x 1"	3,000
	TAG79T1-795	Telecommunications Space - Metalized Polyester	4" x 2"	500
	TAG80T1-795	Telecommunications Space - Metalized Polyester	3" x 5"	500
	TAG72T1-822	Telecommunications Space	2.75" x 1.25"	3,000
Laser Printing	TAG61L-788	Ladder Rack/Conduit	2.62" x 1.0"	7,500
	TAG45L-789	Ladder Rack/Conduit/Splice Enclosure	4.0" x 0.80"	5,000
	TAG53L-788	Telecommunications Space	8.5" x 11"	250
	TAG54L-788	Telecommunications Space	8.5" x 5.5"	500
	TAG55L-788	Telecommunications Space	4.25" x 5.5"	1,000
Dot Matrix Printing	TAG27-400	Ladder Rack/Conduit/Busbar	1.5" x 0.75"	5,000
	TAG45-400	Ladder Rack/Conduit/Splice Enclosure	4.0" x 0.80"	5,000
Ink Jet Printing	TAG28J-450	Ladder Rack/Conduit/Busbar	0.8" x 1.437"	1,000
	TAG57J-108	Telecommunications Space	4.25" x 2.75"	2,000
	TAG56J-108	Telecommunications Space	4.0" x 3.33"	1,500



ANSI/TIA/EIA-606-A
Standard

"An identifier shall be marked on each splice closure or its label."

Splice Labels and Ground Bonding Labeling

Application Guide

Printer	Part Number	Material/ Application (s)	Size (w x l)	Pkg. Qty.
Thermal Transfer	TAG27T1-822	White Polyester Splice Enclosure Label	1.5" X .396"	300
	TAG73T1-822	White Polyester Splice Enclosure Label	2" X 1"	3000
Laser Printing	TAG45L-789	White Polyester Splice Enclosure Label	4" X .80"	5000
Dot Matrix Printing	TAG27-400	White Polyester Splice Enclosure Label	1.5" X .75"	5000
	TAG45-400	White Polyester Splice Enclosure Label	4.0" x .80"	5000
Ink Jet Printing	TAG28J-450	White Polyester Splice Enclosure Label	.80" X 1.437"	5000

Labels and Cable Identifiers for Copper and Fiber Cables



ANSI/TIA/EIA-606-A Standard


"A horizontal link identifier, unique within the building, shall be assigned to each horizontal link and to its elements. Each end of a horizontal cable shall be labeled ...within 12 inches of the end of the cable jacket and visible on the exposed end of the cable jacket"

Application Guide

Printer	Part No.	Max. Bundle Diameter	Wire Type	Size* (w x l ^a x l ^b)	Pkg. Qty.	
Thermal Transfer Printing	TAG2T5-100B	.298"	4 Pair UTP/RG6 & RG59 Coax	.5" X .5" X 1.43"	10,000	
	TAG22T3-100B	.298"	4 Pair UTP/RG6 & RG59 Coax	1" X .5" X 1.43"	5000	
	TAG22T2-100B	.298"	4 Pair UTP/RG6 & RG59 Coax	1" X .5" X 1.43"	5000	
	TAG53T2-100B	.298"	4 Pair UTP/RG6 & RG59 Coax	1.5" X .7" X 1.435"	2500	
	TAG10T2-100B	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	2" X .75" X 2.25"	2500	
	TAG9T3-100B	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	1" X .75" X 2.25"	5000	
	TAG6T1-100B	.87"	50 Pair copper	2" X 1" X 3.75"	1000	
	TAG3T3-100B	.87"	50 Pair copper	1" X 1" X 3.75"	3000	
	TAG7T2-100B	1.88"	100 Pair copper	2" X 1" X 7.34"	1000	
	TAG26T6-100B	.119"	2 Pair Fiber	.5" X .315" X .75"	10,000	
TAG51T3-100B	.375"	2 Pair Fiber	1" X .35" X .75"	10,000		
Thermal Transfer Printing Spirit 2100 Portable Printing System	TAGH2-100	.298"	4 Pair UTP/RG6 & RG59 Coax	.5" X .5" X 1.43"	250	
	TAGH2-1004**	.298"	4 Pair UTP/RG6 & RG59 Coax	.5" X .5" X 1.43"	250	
	TAGH22-100	.298"	4 Pair UTP/RG6 & RG59 Coax	1" X .5" X 1.43"	250	
	TAGH22-1004**	.298"	4 Pair UTP/RG6 & RG59 Coax	1" X .5" X 1.43"	250	
	* 4 indicates yellow label	TAGH9-100	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	1" X .75" X 2.25"	100
	TAGH9-1004*	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	2" X .75" X 2.25"	100	
	TAGH10-100	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	2" X .75" X 2.25"	100	
	TAGH95-100	.87"	Backbone Cable	1" X 1.5" X 3.75"	100	
	TAGH6-100	.87"	50 Pair copper	2" X 1" X 3.75"	100	
	TAGH3-100	.87"	50 Pair copper	1" X 1" X 3.75"	100	
TAGH26-100	.119"	2 Pair Fiber	.5" X .315" X .75"	500		
TAGH51-100	.375"	2 Pair Fiber	1" X .35" X .75"	500		
Laser Printing	TAG63L-105	.298"	4 Pair UTP/RG6 & RG59 Coax	1.0" X .5" X 1.33"	2500	
	TAG2L-105	.298"	4 Pair UTP/RG6 & RG59 Coax	.5" X .5" X 1.43"	5000	
	TAG5L-105	.298"	4 Pair UTP/RG6 & RG59 Coax	.8" X .5" X 1.43"	5000	
	TAG65L-105	.420"	4 Pair STP/25 Pair Copper	.81" X .81" X 2.13"	1000	
	TAG9L-105	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	1" X .75" X 2.25"	1000	
	TAG10L-105	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	2" X .75" X 2.25"	1000	
	TAG50L-105	.760"	50 Pair Copper	1" X .96" X 3.16"	1000	
	TAG64L-105	.778"	50 Pair Copper	1.17" X .83" X 3.33"	1000	
	TAG1L-105	.790"	50 Pair copper	1.9" X .75" X 3.25"	1000	
	TAG49L-105	.186"	2 Pair Fiber	1" X .35" X 1"	2500	
	TAG51L-105	.375"	2 Pair Fiber	1" X .35" X .75"	5000	
	TAG26L-105	.119"	2 Pair Fiber	.5" X .315" X .75"	5000	
Dot Matrix Printing	TAG2-100	.298"	4 Pair UTP/RG6 & RG59 Coax	.5" X .5" X 1.437"	5000	
	TAG5-100	.298"	4 Pair UTP/RG6 & RG59 Coax	.8" X .5" X 1.437"	5000	
	TAG9-100	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	1" X .75" X 2.25"	5000	
	TAG22-100	.298"	4 Pair UTP/RG6 & RG59 Coax	1" X .5" X 1.43"	5000	
	TAG10-100	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	2" X .75" X 2.25"	2500	
	TAG7-100	1.88"	100 Pair Cable	2" X 1.5" X 7.437"	2500	
	TAG6-100	.87"	50 Pair Cable	2" X 1" X 3.75"	2500	
	TAG26-100	.119"	2 Pair Fiber	.5" X .375" X .75"	5000	
Ink Jet Printing	TAG22J-994	.298"	4 Pair UTP/RG6 & RG59 Coax	1" X .5" X 1.625"	1000	
	TAG5J-994	.298"	4 Pair UTP/RG6 & RG59 Coax	.8" X .5" X 1.625"	1000	
	TAG64J-994	.778"	50 Pair copper	1.16" X .86" X 3.25"	1000	
	TAG9J-994	.447"	4 Pair UTP/STP/25 Pair Copper/4-12 Pair Fiber	1" X .75" X 2.25"	1000	
	TAG26J-994	.119"	2 Pair Fiber	.5" X .35" X .75"	2500	
	TAG51J-994	.375"	2 Pair Fiber	1" X .35" X .75"	1000	

* a= length of write on area, b = length of label ** yellow

Telecommunications Space Identifiers

 ANSI/TIA/EIA-606-A Standard	<p><i>“ A Telecommunications Space Identifier (TS), unique within the building shall be assigned to the TS. The TS shall be labeled inside the room so as to be visible to someone working in that room.”</i></p>
---	---






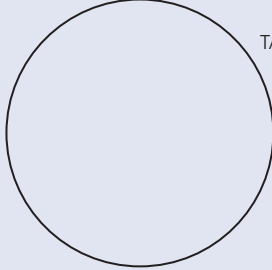
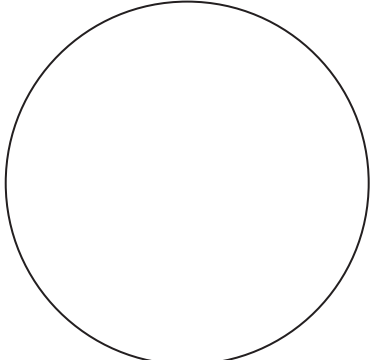
Application Guide

Printer	Part Number	Application(s)	Size (w x l)	Pkg. Qty.
Thermal Transfer Printing	TAG76T1-795	For Flat	2.5" X 2"	1000
	TAG77T1-795	Surfaces	3" X .9375"	2000
	TAG78T1-795	Only	3" X 4"	500
	TAG79T1-795		4" X 2"	500
	TAG80T1-795		3" X 5"	500
Thermal Transfer Spirit® 2100 Portable Printing System	TAGH73-336	For	2" X 1"	250
	TAGH73-3364	Flat	2" X 1"	250
	TAGH27-336	Surfaces	1.5" X .75"	500
	TAGH27-799	Only	1.5" X .75"	500
	TAGH75-336		2" X .625"	500
TAGH75-3364		2" X .625"	500	
Laser Printing	TAG54L-788	For	8.5" X 5.5"	500
	TAG55L-788	Flat	4.25" X 5.5"	1000
	TAG56L-788	Surfaces	4" X 3.33"	1500
	TAG57L-788	Only	4.25" X 2.75"	2000
	TAG58L-788		4" X 2"	2500
Dot matrix printing	TAG44-400	For Flat	1.87" X 1.87"	5000
	TAG45-400	Surfaces Only	4" X .8"	5000
Ink Jet Printing	TAG56J-108	For Flat	4" X 3.33"	1500
	TAG59J-108	Surfaces Only	4" X 1.5"	3500

Wire Diameter Guide to HellermannTyton Labels

This guide can be used to determine which labels will work best with the wire diameter selected. Simply place the end of your wire over the appropriate circle to select the best label size.

Application Guide

IF YOUR WIRE OR CABLE DIAMETER IS LESS THAN OR EQUAL TO BELOW, USE:	SPIRIT 2100 LABELS	THERMAL TRANSFER LABELS	SHRINKTRAK MARKERS	LASER LABELS	INK JET LABELS	DOT MATRIX LABELS
DIAMETER .10" 	TAGH26-100 TAGH51-100	TAG26T6-100B TAG21T6-250 TAG51T3-100B	553-50001 to 553-50014 553-50063 553-50067 to 553-50081	TAG26L-105	TAG26J-994 TAG51J-994	TAG26-100
DIAMETER .20" 	TAGH22-100 TAGH2-100	TAG2T5-100B TAG22T3-100B TAG51T3-100B	553-50015 to 553-50022 553-50065	TAG63L-105 TAG49L-105 TAG51L-105	TAG5J-994 TAG22J-994	TAG2-100 TAG5-100 TAG22-100
DIAMETER .28" 	TAGH2-100 TAGH22-100 TAGH24-100 TAGH25-100	TAG2T5-100B TAG22T3-100B TAG28T4-250 TAG24T1-100B TAG53T2-100B	553-50023 to 553-50027	TAG2L-105 TAG5L-105 TAG63L-105 TAG52L-105	TAG22J-994	TAG2-100 TAG5-100 TAG22-100 TAG24-100 TAG25-100
DIAMETER .54" 	TAGH9-100 TAGH10-100	TAG9T3-100B TAG1T1-100B TAG10T2-100B	553-50028 to 553-50037	TAG9L-105 TAG1L-105 TAG10L-105 TAG65L-105	TAG9J-994	TAG9-100 TAG10-100
DIAMETER .94" 	TAGH3-100 TAGH6-100 TAGH95-100	TAG3T3-100B TAG6T1-100B	553-50038 to 553-50042	TAG50L-105 TAG64L-105	TAG64J-994	TAG3-100 TAG6-100
DIAMETER 1.40" 	TAGH4-100	TAG7T1-100B				TAG4-100 TAG8-100
DIAMETER 1.9" 		TAG7T1-100B TAG38T4-100B				TAG7-100 TAG8-100 TAG23-100 TAG38-100



Spirit® 2100 Portable Printing System

HellermannTyton's Spirit® 2100 portable printing system is easy to use and features "What You See Is What You Get" (WYSIWYG) label design and creation on a LCD screen that shows the outline of the label. Just type in the text (which is displayed on the screen), choose from several print sizes, and press the print button. It's that simple! The printer automatically detects the label and determines the proper size template for easy editing.

The Spirit 2100 provides fast, high quality, thermal transfer printing for permanent and highly legible label printing. The Spirit 2100 prints on many different types of label materials for wire, cable, and component marking. Self-laminating, white and metalized polyester, and tamper evident materials for calibration and security labeling are available for use with the Spirit system.

Features

- "What You See Is What You Get" (WYSIWYG) label design and creation; the label will print just like it looks on the screen
- Font and image customization
- Automatically centers text during label editing process
- Easily imports graphic images onto labels
- Prints with popular bar code symbologies including Code 39, Code 128, and EAN
- Vertical print option for patch panels, wall plates, terminal blocks, and wire markers
- Prints serial numbers on labels with "serial" text type (Spirit® 2100 will also automatically remember the last serial number printed the next time the saved label is used)
- Ribbon is longer than the industry standard which translates into fewer ribbon change-overs
- Battery power and a convenient hand strap makes the Spirit® 2100 extremely portable and accessible (AC adapter also available)
- Auto "fill" feature to copy one line of text to all other lines on the label



SpiritLink

SpiritLink is a utility that allows data to be transferred back and forth between the Spirit handheld printer and a computer. Using SpiritLink, saved files can be uploaded or downloaded to a personal computer and even transferred to other Spirit printers.

Batch Printing

SpiritLink allows you to take label data that is already in a database and upload it as a batch to the Spirit printer. This eliminates tedious and redundant data entry, reduces keyboard entry errors, and speeds production. Simply connect the Spirit printer to a personal computer using SpiritLink, and download a database file. Once a database file is downloaded to the Spirit printer, the file can be accessed from the Spirit printer and labels can be printed on demand in the field.

Edit Logging

For the first time, a portable label printer is smart enough to keep track of what you printed! The Spirit printer keeps a database file of printed labels which can be used to keep track of every label printed. This feature has many useful applications. For example, a telecom contractor using the Spirit printer would automatically have a record of any moves, adds, or changes to an installation. The contractor could also download this information and transfer it to existing cable management software or save it for future use.

Product Selection




Part Number	Description	Pkg. Qty.
HT2100*	Spirit® 2100 Portable Printing System	1
HHIGR*	Standard Ribbon for Spirit Printer	1
HHHST	Self Laminating Ribbon for Spirit Printer	1
HHDTH*	DTH Ribbon for Spirit Printer	1
BC10*	Battery Charger 120V 60 Hz	1
2100CASE*	Replacement Carrying Case	1
2100CABLE	RS-232 Interface Cable (optional)	1
RBP1*	Battery Pack NiCad (replacement)	1
2100PEN*	Cleaning Pen (replacement)	1
TS3003039*	Spindle for Label Roll (replacement)	1
TS3003040*	Spindle Cap (replacement)	1
2100CARD*	Cleaning Card 2" x 6" (replacement)	1
2100AC	AC Power Adapter	1

*Portable Printing System Includes: Spirit® 2100 printer, rechargeable battery and charger, ribbon cartridge, TAGH73-336, printer manual, CD-Rom tutorial, hard shell case, cleaning card, cleaning pen and Spiritlink computer interface software (interface software cable sold separately)

Spirit® 2100 Specifications

- 203 dpi thermal transfer printhead
- NiCad battery charger
- Label tear off
- Weight: 2.5 lbs. — shipping weight: 7.5 lbs.
- Maximum label width: 2.0"
- Memory: 68K SRAM, 128 Program memory, 256K of non-volatile storage
- Chargers available for 120V, 130V, 230V or 100V applications
- 2.0" x 1.5" LCD screen
- Alphanumeric elastomer keypad
- Operating Temperature: +40°F to +122°F (+4°C to +50°C)
- Storage Temperature: -30°F to +160°F (-34°C to +71°C)

Label Material Specification

Material	100 Material	336 Material	409 Material	799 Material
Name	Self-Laminating Vinyl	White Polyester	Tamper Evident Vinyl	Metalized Polyester
Topcoat	Specially formulated for superb ink anchorage	Specially formulated for superb ink anchorage	Specially formulated for superb ink anchorage	Specially formulated for superb ink anchorage
Liner	50#	50#	50#	50#
Temp. Range	-50°F to +200°F (-46°C) (+93°C)	-40°F to +300°F (-40°C) (+149°C)	-40°F to +175°F (-40°C) (+80°C)	-40°F to +300°F (-40°C) (+149°C)
Adhesive	Acrylic	Acrylic	Acrylic	Acrylic
Application	For wire and cable	Flat or slightly curved surfaces	Flat or slightly curved surfaces	Flat or slightly curved surfaces
Ribbon	HHIGR or HHHST (recommended) 	HHIGR 	HHIGR	HHIGR 

Spirit® 2100 Portable Printing System

Ribbon

The ribbon is supplied in a self-contained cartridge for easy loading. *One ribbon per package.*




Product Selection

Part Number	Description	Pkg. Qty.	Width in. (mm)	Length in. (M)
HHIGR	Standard Ribbon	1	2 (50.8)	131 (40)
HHHST	Self-Laminating Ribbon	1	2 (50.8)	131 (40)

HHIGR works on all materials

Label Loading

Each roll of labels is loaded onto a reusable spindle. Simply drop the label roll into the printer, pull the labels over the top (like loading film into a camera) and close the cover. The printer automatically feeds and aligns the labels.

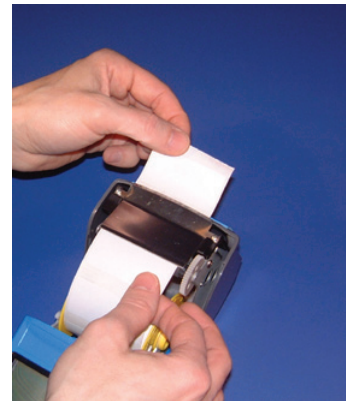

Spirit® 2100 Portable Printing System Labels

Product Selection

PART NUMBER	LABEL MATERIAL	COLOR	WIDTH OF LABEL IN. (MM)	LENGTH OF WRITE-ON AREA IN. (MM)	LENGTH OF LABEL IN. (MM)	WIDTH OF LINER IN. (MM)	LABELS PER ROLL
TAGH1-100		White	1.9 (48.26)	0.75 (19.05)	3.19 (81.02)	2.025 (51.43)	100
TAGH2-100		White	0.5 (12.7)	0.5 (12.7)	1.435 (36.5)	0.875 (22.22)	250
TAGH2-1004		Yellow	0.5 (12.7)	0.5 (12.7)	1.435 (36.5)	0.875 (22.22)	250
TAGH3-100		White	1.0 (25.4)	1.0 (25.4)	3.75 (95.25)	1.125 (28.57)	100
TAGH4-100		White	2.0 (50.8)	1.5 (38.1)	5.937 (150.79)	2.125 (53.97)	50
TAGH6-100		White	2.0 (50.8)	1.0 (25.4)	3.75 (95.25)	2.125 (53.97)	100
TAGH9-100		White	1.0 (25.4)	0.75 (19.05)	2.25 (57.1)	1.125 (28.57)	100
TAGH9-1004		Yellow	1.0 (25.4)	0.75 (19.05)	2.25 (57.1)	1.125 (28.57)	100
TAGH10-100	100	White	2.0 (50.8)	0.75 (19.05)	2.25 (57.1)	2.125 (53.97)	100
TAGH22-100		White	1.0 (25.4)	0.5 (12.7)	1.435 (36.5)	1.125 (28.57)	250
TAGH22-1004		Yellow	1.0 (25.4)	0.5 (12.7)	1.435 (36.5)	1.125 (28.57)	250
TAGH23-100		White	1.0 (25.4)	1.5 (38.1)	7.437 (188.89)	1.125 (28.57)	50
TAGH24-100		White	2.0 (50.8)	0.5 (12.7)	1.435 (36.5)	2.125 (53.97)	250
TAGH25-100		White	0.75 (19.05)	0.5 (12.7)	1.75 (44.45)	0.875 (22.22)	175
TAGH26-100		White	0.5 (12.7)	0.35 (8.8)	0.75 (19.05)	0.875 (22.22)	500
TAGH51-100		White	1.0 (25.4)	.35 (8.8)	0.75 (19.05)	1.125 (28.57)	500
TAGH95-100		White	1.5 (38.1)	1.0 (25.4)	3.75 (95.25)	1.625 (41.27)	100
TAGH12-336		White	1.25 (31.75)	0.375 (9.52)	N/A	1.375 (34.92)	500
TAGH13-336		White	0.75 (31.75)	0.25 (6.35)	N/A	1.025 (26.03)	750
TAGH14-336		White	1.0 (25.4)	0.375 (9.52)	N/A	1.125 (28.57)	500
TAGH15-336		White	1.0 (25.4)	0.5 (12.7)	N/A	1.125 (28.57)	500
TAGH15-3364		Yellow	1.0 (25.4)	0.5 (12.7)	N/A	1.125 (28.57)	500
TAGH16-336		White	0.9 (22.86)	0.25 (6.35)	N/A	1.025 (26.03)	750
TAGH17-336		White	1.5 (38.1)	0.25 (6.35)	N/A	1.625 (41.27)	750
TAGH27-336		White	1.5 (38.1)	0.75 (19.05)	N/A	1.625 (41.27)	500
TAGH35-336		White	2.0 (50.8)	0.375 (9.52)	N/A	2.125 (53.97)	500
TAGH48-336		White	0.8 (20.32)	0.5 (12.7)	N/A	0.925 (23.49)	500
TAGH70-336		White	0.25 (6.35)	0.25 (6.35)	N/A	1.025 (26.03)	750
TAGH71-336		White	0.5 (12.7)	0.435 (11.1)	N/A	0.875 (22.22)	500
TAGH73-336		White	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH73-3362		Red	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH73-3363		Orange	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH73-3364		Yellow	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH73-3365	336	Green	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH73-3366		Blue	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH75-336		White	2.0 (50.8)	0.625 (15.87)	N/A	2.125 (53.97)	500
TAGH75-3364		Yellow	2.0 (50.8)	0.625 (15.87)	N/A	2.125 (53.97)	500
TAGH85-336		White	1.25 (31.75)	0.25 (6.35)	N/A	1.375 (34.92)	750
TAGH86-336		White	2.0 (50.8)	0.25 (6.35)	N/A	2.125 (53.97)	750
TAGH88-336		White	1.5 (38.1)	0.375 (9.52)	N/A	1.625 (41.27)	500
TAGH89-336		White	1.75 (44.45)	0.375 (9.52)	N/A	1.87 (47.49)	500
TAGH90-336		White	1.5 (38.1)	0.5 (12.7)	N/A	1.625 (41.27)	500
TAGH90-3364		Yellow	1.5 (38.1)	0.5 (12.7)	N/A	1.625 (41.27)	500
TAGH92-336		White	1.0 (25.4)	0.75 (19.05)	N/A	1.125 (28.57)	500
TAGH94-336		White	1.5 (38.1)	1.25 (31.75)	N/A	1.625 (41.27)	250
TAGHPP-336		White	0.625 (15.87)	0.333 (8.45)	N/A	0.875 (22.22)	500
TAGH96-336		White	2.0 (50.8)	0.396 (10.05)	N/A	2.125 (53.97)	750
TAGH096-3364		Yellow	0.625 (15.8)	0.25 (6.35)	N/A	0.875 (22.2)	500
TAGH97-336		White	1.875 (47.62)	0.25 (6.35)	N/A	2.0 (50.8)	750
TAGH98-336		White	1.9 (48.26)	0.375 (9.52)	Non-Adhesive	2.025 (51.43)	250
TAGHTP-336		White	0.333 (8.45)	continuous	N/A	1.125 (28.57)	37 ft.
TAGH15-409	409	White	1.0 (25.4)	0.5 (12.7)	N/A	1.125 (28.57)	500
TAGH92-409		White	1.0 (25.4)	0.75 (19.05)	N/A	1.125 (28.57)	500
TAGH27-799		White	1.5 (38.1)	0.75 (19.05)	N/A	1.625 (41.27)	500
TAGH73-799		White	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH75-799	799	White	2.0 (50.8)	0.625 (15.87)	N/A	2.125 (53.97)	500
TAGH90-799		White	1.5 (38.1)	0.5 (12.7)	N/A	1.625 (41.27)	500
TAGH92-799		White	1.0 (25.4)	0.75 (19.05)	N/A	1.125 (28.57)	500
TAGH94-799		White	1.5 (38.1)	1.25 (31.75)	N/A	1.625 (41.27)	250
TAGH27-840	840	White	1.5 (38.1)	0.75 (19.05)	N/A	1.625 (41.27)	500
TAGH27-843	843	White	1.5 (38.1)	0.75 (19.05)	N/A	1.625 (41.27)	500
TAGH28-DTH		White	0.8 (20.3)	1.437 (36.5)	N/A	0.925 (23.4)	250
TAGH73-DTH	DTH	White	2.0 (50.8)	1.0 (25.4)	N/A	2.125 (53.97)	250
TAGH75-DTH		White	2.0 (50.8)	0.625 (15.87)	N/A	2.125 (53.97)	500
TAGH90-DTH		White	1.5 (38.1)	0.5 (12.7)	N/A	1.625 (41.27)	500

TagPrint606 Professional Label Creation Software

TagPrint™ label creation and printing software is powerful, multi-functional, and extremely easy to use. This user-friendly software provides the ultimate solution for labeling cable and components from the telecommunications room to the workstation, resulting in higher productivity and labor savings. TagPrint™ software can be utilized with HellermannTyton's wide array of label options including laser, ink jet, dot matrix and thermal transfer printable labels.

TAGPRINT 606

Designed specifically for the telecommunications market, Tagprint 606 is a labeling software program which allows users to easily comply with ANSI/TIA/EIA-606-A standards.

- Label design wizard guides user quickly and easily through label design process
- Provides built-in tables and label design templates including the most common label sequences used to mark patch panels, wall plates, and horizontal links
- Allows user to place telecom graphics, texts, and lines anywhere on the label
- Includes powerful sequencing feature which eliminates tedious data entry
- Imports and exports data in Excel, CSV, and ASCII files
- Designed to create labels for patch panels, patch cords, faceplates, racks, telecom spaces, fiber and copper cables, and enclosures
- Directly transfers information to HellermannTyton's Spirit handheld printer for use in the field, eliminating need to manually type information in handheld label printer
- Imports images, draws shapes and borders, and allows for complete customization of labels
- Multilingual




Product Selection

Part Number	Description	System Requirements	Media	Pkg. Qty.
556-00022	TagPrint™ Pro Software - Version 2.0	Windows 98se, ME, NT4.0, 2000 or XP	CDROM	1
556-00024	TagPrint™ Pro Software Upgrade - Version 2.0	Windows 98se, ME, NT4.0, 2000 or XP	CDROM	1

Demos of TagPrint Pro software can be downloaded from the website: http://www.hellermann.tyton.com/tag_print_pro.asp

TagPrint**PRO** Professional Label Creation Software

TagPrint™ Pro label creation and printing software is the ultimate solution for any identification application. With the usability of TagPrint606, TagPrint Pro offers numerous added features and offers many powerful options for a wide variety of labeling requirements. “What You See Is What You Get” (WYSIWYG) label creation, bar coding, serialization, label sets, wire lists, graphics and text choices are just some capabilities of TagPrint Pro software. TagPrint Pro can be utilized with HellermannTyton's wide array of label options including laser, ink jet, dot matrix and thermal transfer printable labels.

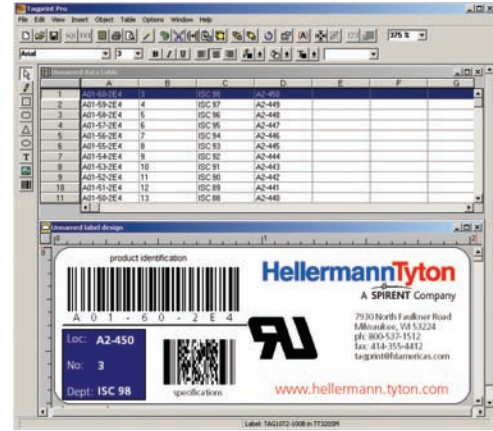

The following table compares the different features of TagPrint 606 and TagPrint Pro. A demo version of TagPrint Pro software can be downloaded at http://www.hellermann.tyton.com/tag_print_pro.asp

	TagPrint606	TagPrintPRO
	VERSION 1.0	VERSION 2.0
LABEL DESIGN		
Barcodes		•
Draw an object with lines/rectangles/triangles/eclipse tools	•	•
Save Label Design as .xml AND .jpg files	•	•
IMAGES		
Variable images - different on each label		•
Image Manipulation - Mirror, Flip and Inverse	•	•
TEXT		
Text tool option - Line Spacing		•
Text tool option - Horizontal and Vertical Scaling		•
Text tool option - % Scale		•
Text tool option - Tracking Text		•
TABLES		
Import Excel tables using ODBC (Open Database Connectivity)*		•
Open Excel tables	•	•
Import ASCII text	•	•
Export .CSV file to the Spirit 2100 using SpiritLink software	•	•
Multitple table columns		•
ONLY single table column	•	
Multiple table rows	•	•
Serial numbers and alphanumeric sequences	•	•
OTHER		
Open label database		•
Print Later Capabilities		•
Lock-out unauthorized users		•

* ODBC allows the user to import specific columns/rows of an Excel file. ODBC offers more control compared with opening Excel tables in TagPrint software.

THERMAL TRANSFER PRINTERS

HellermannTyton's thermal transfer printing systems increase productivity and quality in a variety of manufacturing environments.

TT320SM PRINTER

The HellermannTyton TT320SM printer is a thermal transfer printing system designed for medium to low volume users of HellermannTyton thermal transfer labels and ShrinkTrak. The 300 dot per inch resolution allows for printing of smooth scalable graphics and highly defined characters. With fast printing and little waste, the TT320SM performance allows for time and labor savings.

PRODUCT FEATURES

- 300 dots per inch thermal transfer printer
- Print speed of 1" to 2" per second
- Prints label lengths up to 11" & 10" with standard memory
- 512K SRAM / 1 MB Flash RAM standard
Upgradable to 1MB SRAM
- Easy-to-load label and ribbon path
- Sturdy metal enclosure
- Internal rewinder standard
- Printer is not supplied with ribbons. Order ribbons separately.



TT320SM Technical Specifications* **

Printing

- Direct thermal or thermal transfer printing
- Selectable print speeds of 1" to 2" per second
- TT320SM: 300 dpi (dots per inch) print resolution
- IPHC (Intelligent Print Head Control) for high quality printing in all orientations
- Maximum print width: 4.09"
- Printable thickness (including liner): 0.0003" to 0.0100"

Communications

- RS-232 Serial
- Bi-directional Centronics Parallel
- USB (V1.1) Reflective and Transmissive Media Sensors

Environmental

- Operating temperature: +40° F to +104° F (+4° C to +40° C)
- Storage temperature: -40° F to +140° F (-40° C to +60° C)
- Humidity: 10% to 95% non-condensing
- Ventilation: free air

* For optimum print quality, clean the print head after every roll of labels.

** The CADDY5.0 is recommended for use.

Mechanical

- Width: 7.9"
- Depth: 8.9"
- Height: 7.0"
- Weight: 4 lbs.

Electrical

- Auto detectable 90-265 VAC power supply
- FCC, CE, VCCI, C-TIC, CB, VL, NOM, CCC
- Meets FCC Class A and VDE Class B emission standards

Label Capacity

- Minimum - maximum label width: 0.65" to 4.25"
- Minimum label height: 0.25"
- HellermannTyton labels must be fed through a slot in rear panel of printer from CADDY5.0

Product Selection

Part Number	Description	Pkg. Qty.
TT320SM	Thermal Transfer Printer (Medium to Low Volume)—High Resolution	1
CADDY5.0	Caddy for TT320SM Printe	1
105910-155	Replacement printhead for TT320SM print	1
105950-043	Replacement power supply - 20 Volt	1

ShrinkTrak™ Heat Shrinkable Markers

HellermannTyton's ShrinkTrak™ heat shrinkable markers make it easy to mark wire, cable, and other components. These ladder-style markers are designed with side slits for easier application. All ShrinkTrak™ markers are military specified. They also reduce printer jams with their efficient and high performance design. For seamless labeling, ShrinkTrak™ can be printed using HellermannTyton's TagPrint Pro professional label creation software, thermal transfer printers and ribbons to create a permanent and solvent resistant print when shrunk and applied.

VERSATILE


- Flexible, flame retardant, heat shrinkable polyolefin tubing meets all military specifications
- 3:1 shrink ratio
- Standard colors - yellow, white and black
- Larger packaging options result in less box changes

HIGH PERFORMANCE DESIGN

- Center slit versions reduce or eliminate hand cutting
- Non-slip, printable liner allows additional marker data to be printed on the reverse side for records and placement instructions
- Utilize HellermannTyton's Durattach ribbon system for the highest print performance on the market

REDUCE PRINTER JAMS

- Markers dispense directly into HellermannTyton thermal transfer printers with custom box opening
- Dispense markers faster and easier with waxed core dispenser

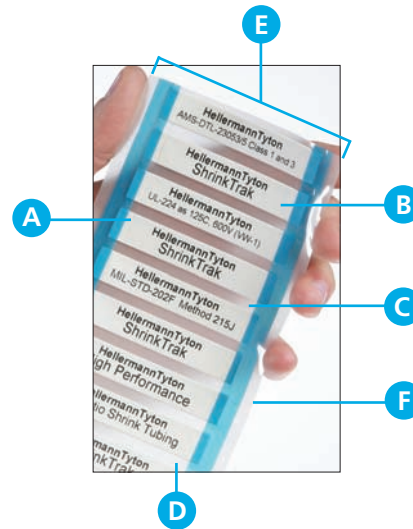

- A.** Side slit for easy insertion and removal from liner
- B.** Smooth, flat surface allows for consistent printing
- C.** Reduced spacing between markers for more efficiency
- D.** Markers firmly secured on anti-static liner to reduce static build-up in printers
- E.** Standard width to fit almost all thermal transfer printers
- F.** Pin-feed system not required

EASE OF USE - STEP BY STEP GUIDE



Step 1
Print with thermal transfer printer



Step 2
Bend liner at side slit



Step 3
Insert wire into marker



Step 4
Pull-up on wire - the marker will pull away from liner



ShrinkTrak Applied!

Identification Products

SHRINKTRAK MARKERS *continued*

ShrinkTrak Technical Specifications

Film:	Anti-static, non-slip 2 mil clear polyester
Product thickness:	3 mil total thickness
Shrink temp. (nominal):	194°F (90°C)
Flame Retardant:	Yes
Operating temp. range:	-67°F to +275°F (-55°C to +135°C)
Flexibility:	Excellent
Abrasion Resistance:	Good
Solvent Resistance:	Good
Standard Colors:	White, yellow & black*
UL Rating:	Meets UL-224 as 125°C, 600V (VV-1)
Approvals:	SAE-AS81531** AMS-DTL-23053/5 Class 1 and 3 except for recovered diameter MIL-STD-202G Method 215K

* Contact HellermannTyton for custom color options

** Meets print performance requirements of SAE-AS81531 using the ribbons listed above in any thermal transfer printer, including HellermannTyton's TT320SM & TT1210

RECOMMENDED THERMAL TRANSFER RIBBONS

TT320SM Printer

- TTDTHOUTSM
- TT822OUTSM
- TTHSTOUTSM
- TT900OUTSM

TT1210 or other thermal transfer printers

- TTDTHOUT
- TT822OUT
- TTHSTOUT
- TT900OUT



TTDTHOUTSM and TTDTHOUT ribbons combined with ShrinkTrak™ markers achieve the highest print performance on the market.



ShrinkTrak Material Specifications

Application Guide



DIAMETER SIZE	0.125"	0.187"	0.25"	0.375"	0.50"	0.75"	1.0"
WIRE SIZE RANGE (AWG/MCM)	18-22 (.044-.1)	12-18 (.089-.122)	10-16 (.091-.219)	8-14 (.137-.320)	2-10 (.183-.425)	6-0000 (.315-.725)	1-400 (.366-.876)
INSIDE DIAMETER AS SUPPLIED IN. (MM)*	0.118 +/- 0.024 (3.0 +/- 0.6)	0.177 +/- 0.032 (4.5 +/- 0.8)	0.236 +/- 0.040 (6.0 +/- 1.0)	0.354 +/- 0.040 (9.0 +/- 1.0)	0.472 +/- 0.040 (12.0 +/- 1.0)	0.732 +/- 0.040 (18.6 +/- 1.0)	1.57 +/- 0.040 (40.0 +/- 1.0)
INSIDE DIAMETER AFTER RECOVERY IN. (MM)**	0.043 (1.1)	0.063 (1.6)	0.083 (2.1)	0.122 (3.1)	0.166 (4.2)	0.25 (6.35)	0.33 (8.3)
WALL THICKNESS AFTER RECOVERY IN. (MM)	0.024 +/- 0.004 (0.60 +/- 0.10)	0.026 +/- 0.004 (0.65 +/- 0.10)	0.028 +/- 0.004 (0.70 +/- 0.10)	0.031 +/- 0.006 (0.80 +/- 0.15)	0.033 +/- 0.006 (0.85 +/- 0.15)	0.036 +/- 0.006 (0.91 +/- 0.15)	0.039 +/- 0.006 (1.0 +/- 0.15)
OVERALL WIDTH IN. (MM)	0.209 +/- 0.040 (5.3 +/- 1.0)	0.303 +/- 0.052 (7.7 +/- 1.3)	0.398 +/- 0.063 (10.1 +/- 1.6)	0.587 +/- 0.063 (14.9 +/- 1.6)	0.776 +/- 0.063 (19.7 +/- 1.6)	1.21 +/- 0.063 (30.8 +/- 1.6)	1.63 +/- 0.063 (41.38 +/- 1.6)
OVERALL HEIGHT IN. (MM)	0.020 (0.508)	0.020 (0.508)	0.020 (0.508)	0.022 (0.558)	0.023 (0.582)	0.025 (0.63)	0.03 (0.76)

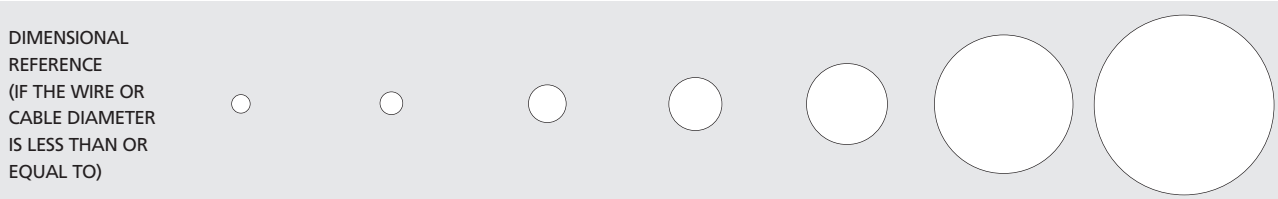

SHRINKTRAK MARKERS *continued*

Product Selection

PART NUMBER*	CROSS REFERENCE TO FORMER HT PRODUCT	TYPE**	COLOR	CENTER SLIT	DIAMETER IN. (MM)	W IN. (MM)	H IN. (MM)	PKG. QTY.
553-50001	THS-610BM	HST3-1BK	Black	-	.125 (3.17)	1.9 (48.26)	.235 (5.97)	250
553-50002	THS-610W	HST3-1WH	White	-	.125 (3.17)	1.9 (48.26)	.235 (5.97)	250
553-50003	THS-610W10C	HST3-1WH	White	-	.125 (3.17)	1.9 (48.26)	.235 (5.97)	1000
553-50078	THS-610W25C	HST3-1WH	White	-	.125 (3.17)	1.9 (48.26)	.235 (5.97)	2500
553-50004	THS-610WP	HST3-1WH-S	White	Single	.125 (3.17)	.95 (24.1)	.235 (5.97)	500
553-50074	THS-610WP10C	HST3-1WH-S	White	Single	.125 (3.17)	.95 (24.1)	.235 (5.97)	2000
553-50067	THS-610WP25C	HST3-1WH-S	White	Single	.125 (3.17)	.95 (24.1)	.235 (5.97)	5000
553-50070	THS-610W2P	HST3-1WH-S	White	Double	.125 (3.17)	.633 (16.08)	.235 (5.97)	750
553-50075	THS-610W2P10C	HST3-1WH-S	White	Double	.125 (3.17)	.633 (16.08)	.235 (5.97)	3000
553-50063	THS-610W3P	HST3-1WH-S	White	Triple	.125 (3.17)	.475 (12.07)	.235 (5.97)	1000
553-50088	THS-610W3P10C	HST3-1WH-S	White	Triple	.125 (3.17)	.475 (12.07)	.235 (5.97)	4000
553-50006	THS-610Y10C	HST3-1YE	Yellow	-	.125 (3.17)	1.9 (48.26)	.235 (5.97)	1000
553-50005	THS-610Y	HST3-1YE	Yellow	-	.125 (3.17)	1.9 (48.26)	.235 (5.97)	250
553-50007	THS-610YP	HST3-1YE-S	Yellow	Single	.125 (3.17)	.95 (24.1)	.235 (5.97)	500
553-50076	THS-610YP10C	HST3-1YE-S	Yellow	Single	.125 (3.17)	.95 (24.1)	.235 (5.97)	2000
553-50071	THS-610Y2P	HST3-1YE-S	Yellow	Double	.125 (3.17)	.633 (16.08)	.235 (5.97)	750
553-50077	THS-610Y2P10C	HST3-1YE-S	Yellow	Double	.125 (3.17)	.633 (16.08)	.235 (5.97)	3000
553-50008	THS-615BM	HST4.8-1.6BK	Black	-	.187 (4.74)	1.9 (48.26)	.312 (7.92)	250
553-50009	THS-615W	HST4.8-1.6WH	White	-	.187 (4.74)	1.9 (48.26)	.312 (7.92)	250
553-50010	THS-615W10C	HST4.8-1.6WH	White	-	.187 (4.74)	1.9 (48.26)	.312 (7.92)	1000
553-50079	THS-615W50C	HST4.8-1.6WH	White	-	.187 (4.74)	1.9 (48.26)	.312 (7.92)	5000
553-50011	THS-615WP	HST4.8-1.6WH-S	White	Single	.187 (4.74)	.95 (24.1)	.312 (7.92)	500
553-50080	THS-615WP10C	HST4.8-1.6WH-S	White	Single	.187 (4.74)	.95 (24.1)	.312 (7.92)	2000
553-50068	THS-615W2P	HST4.8-1.6WH-S	White	Double	.187 (4.74)	.633 (16.08)	.312 (7.92)	750
553-50072	THS-615W2P10C	HST4.8-1.6WH-S	White	Double	.187 (4.74)	.633 (16.08)	.312 (7.92)	3000
553-50064	THS-615W3P	HST4.8-1.6WH-S	White	Triple	.187 (4.74)	.475 (12.07)	.312 (7.92)	1000
553-50081	THS-615W3P10C	HST4.8-1.6WH-S	White	Triple	.187 (4.74)	.475 (12.07)	.312 (7.92)	4000
553-50013	THS-615Y10C	HST4.8-1.6YE	Yellow	-	.187 (4.74)	1.9 (48.26)	.312 (7.92)	1000
553-50012	THS-615Y	HST4.8-1.6YE	Yellow	-	.187 (4.74)	1.9 (48.26)	.312 (7.92)	250
553-50014	THS-615YP	HST4.8-1.6YE-S	Yellow	Single	.187 (4.74)	.95 (24.1)	.312 (7.92)	500
553-50069	THS-615Y2P	HST4.8-1.6YE-S	Yellow	Double	.187 (4.74)	.633 (16.08)	.312 (7.92)	750
553-50073	THS-615Y2P10C	HST4.8-1.6YE-S	Yellow	Double	.187 (4.74)	.633 (16.08)	.312 (7.92)	3000
553-50015	THS-620BM	HST6-2BK	Black	-	.25 (6.35)	1.9 (48.26)	.420 (10.67)	250
553-50016	THS-620W	HST6-2WH	White	-	.25 (6.35)	1.9 (48.26)	.420 (10.67)	250
553-50017	THS-620W10C	HST6-2WH	White	-	.25 (6.35)	1.9 (48.26)	.420 (10.67)	1000
553-50018	THS-620W50C	HST6-2WH	White	-	.25 (6.35)	1.9 (48.26)	.420 (10.67)	5000
553-50019	THS-620WP	HST6-2WH-S	White	Single	.25 (6.35)	.95 (24.1)	.420 (10.67)	500
553-50084	THS-620WP10C	HST6-2WH-S	White	Single	.25 (6.35)	.95 (24.1)	.420 (10.67)	2000
553-50082	THS-620W2P	HST6-2WH-S	White	Double	.25 (6.35)	.633 (16.08)	.420 (10.67)	750
553-50065	THS-620W3P	HST6-2WH-S	White	Triple	.25 (3.17)	.475 (12.07)	.420 (10.67)	1000
553-50089	THS-620W3P10C	HST6-2WH-S	White	Triple	.25 (3.17)	.475 (12.07)	.420 (10.67)	4000
553-50020	THS-620Y	HST6-2YE	Yellow	-	.25 (6.35)	1.9 (48.26)	.420 (10.67)	250
553-50021	THS-620Y10C	HST6-2YE	Yellow	-	.25 (6.35)	1.9 (48.26)	.420 (10.67)	1000
553-50022	THS-620YP	HST6-2YE-S	Yellow	Single	.25 (6.35)	.95 (24.1)	.420 (10.67)	500
553-50085	THS-620YP10C	HST6-2YE-S	Yellow	Single	.25 (6.35)	.95 (24.1)	.420 (10.67)	2000
553-50083	THS-620Y2P	HST6-2YE-S	Yellow	Double	.25 (6.35)	.633 (16.08)	.420 (10.67)	750
553-50023	THS-625BM	HST9-3BK	Black	-	.375 (9.52)	1.9 (48.26)	.597 (15.16)	250
553-50024	THS-625W	HST9-3WH	White	-	.375 (9.52)	1.9 (48.26)	.597 (15.16)	250
553-50025	THS-625WP	HST9-3WH-S	White	Single	.375 (9.52)	.95 (24.1)	.597 (15.16)	500
553-50066	THS-625W3P	HST9-3WH-S	White	Triple	.375 (9.52)	.475 (12.07)	.597 (15.16)	1000
553-50026	THS-625Y	HST9-3YE	Yellow	-	.375 (9.52)	1.9 (48.26)	.597 (15.16)	250
553-50027	THS-625YP	HST9-3YE-S	Yellow	Single	.375 (9.52)	.95 (24.1)	.597 (15.16)	500
553-50028	THS-630BM	HST12-4BK	Black	-	.50 (12.7)	1.9 (48.26)	.77 (19.55)	250
553-50029	THS-630W	HST12-4WH	White	-	.50 (12.7)	1.9 (48.26)	.77 (19.55)	250
553-50030	THS-630WP	HST12-4WH-S	White	Single	.50 (12.7)	.95 (24.1)	.77 (19.55)	500
553-50086	THS-630W3P	HST12-4WH-S	White	Triple	.50 (12.7)	.475 (12.07)	.77 (19.55)	1000
553-50031	THS-630Y	HST12-4YE	Yellow	-	.50 (12.7)	1.9 (48.26)	.77 (19.55)	250
553-50032	THS-630YP	HST12-4YE-S	Yellow	Single	.50 (12.7)	.95 (24.1)	.77 (19.55)	500
553-50087	THS-630Y3P	HST12-4YE-S	Yellow	Triple	.50 (12.7)	.475 (12.07)	.77 (19.55)	1000
553-50033	THS-635BM	HST18-6BK	Black	-	.75 (19.05)	1.9 (48.26)	1.2 (30.48)	250
553-50034	THS-635W	HST18-6WH	White	-	.75 (19.05)	1.9 (48.26)	1.2 (30.48)	250
553-50035	THS-635WP	HST18-6WH-S	White	Single	.75 (19.05)	.95 (24.1)	1.2 (30.48)	500
553-50036	THS-635Y	HST18-6YE	Yellow	-	.75 (19.05)	1.9 (48.26)	1.2 (30.48)	250
553-50037	THS-635YP	HST18-6YE-S	Yellow	Single	.75 (19.05)	.95 (24.1)	1.2 (30.48)	500
553-50038	THS-640BM	HST24-8BK	Black	-	1.0 (25.4)	1.9 (48.26)	1.69 (42.93)	250
553-50039	THS-640W	HST24-8WH	White	-	1.0 (25.4)	1.9 (48.26)	1.69 (42.93)	250
553-50040	THS-640WP	HST24-8WH-S	White	Single	1.0 (25.4)	.95 (24.1)	1.69 (42.93)	500
553-50041	THS-640Y	HST24-8YE	Yellow	-	1.0 (25.4)	1.9 (48.26)	1.69 (42.93)	250
553-50042	THS-640YP	HST24-8YE-S	Yellow	Single	1.0 (25.4)	.95 (24.1)	1.69 (42.93)	500



*Order ShrinkTrak with Part Number


**Type should be used for drawing and specification requests

Termination Position Labeling

Pre-Printed Adhesive Marker Cards

HellermannTyton's Handi-Cards are easy release vinyl cloth markers supplied on a plastic card. They feature a strong adhesive which assures a long lasting bond on wire and cable. The cards contain a black legend on white background and are available in sequence with the lowest number or letter first, or the same legend on each card. The Handi-Card markers are available in individual cards, or as a Handi-Pak, a convenient pocket sized booklet.

Handi-Cards

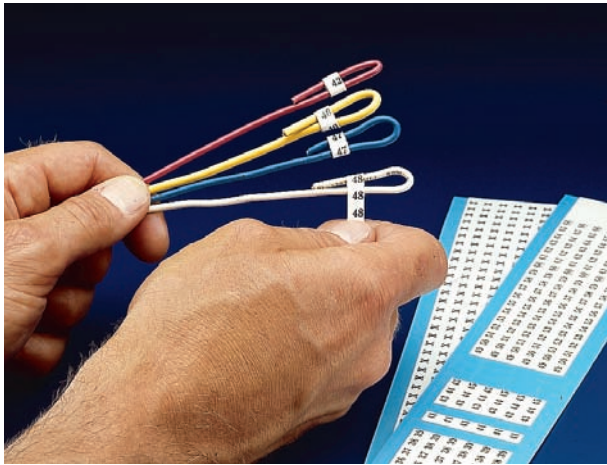

Sequence Handi-Cards

Each marker on the card contains a different number or letter. It runs in sequence beginning with the lowest number or letter first, and ending with the highest.

Product Selection

Part Number	Description	Markers/ Card	Pkg. Qty.
TYHC1-33	1-33 Sequence Handi-Card	33	25 cards
TYHC34-66	34-66 Sequence Handi-Card	33	25 cards
TYHC67-99	67-99 Sequence Handi-Card	33	25 cards
TYHCA-Z	A-J Sequence Handi-Card	36	25 cards

Solid Handi-Cards

Each marker on the card contains the same legend.

Product Selection

Part Number	Description	Markers/ Card	Pkg. Qty.
TYHC 0,1,2, thru 99	Same Legend Handi-Card	36	25 cards
TYHC100	Same Legend Handi-Card	25	25 cards
TYHC A,B,C, thru Z	Same Legend Handi-Card	36	25 cards
TYHC L1,L2, or L3	Same Legend Handi-Card	36	25 cards
TYHC T1,T2, or T3	Same Legend Handi-Card	36	25 cards

Handi-Paks

- Convenient pocket sized booklets
- Black non-smear legends on a white background
- Plastic coated cloth material remains flexible
- Strong adhesive assures firm bond on wire



Product Selection

Part Number	Description	Pkg. Qty.
TCWM1	45 Markers each #0-9	1 booklet
TCWM2	10 Markers each A-Z, 1-15, +,-, /	1 booklet
TCWM3	10 Markers each 1-45	1 booklet
TCWM4	150 Markers each 1, 2, 3	1 booklet
TCWM5	150 Markers each A, B, C	1 booklet
TCWM6	150 Markers each T1, T2, T3	1 booklet
TCWM7	150 Markers each L1, L2, L3	1 booklet
TCWM8	6 Markers each 1-15	
	4 Markers each 16-90	1 booklet
	2 Markers each A-Z, +,-, /	
TCWM9	45 Markers each 1, 2, 3, A, B, C	
	30 Markers each L1, L2, L3	1 booklet
	30 Markers each T1, T2, T3	
TCWM10	45 Markers each of 10 NEMA colors	1 booklet
TCWM11	15 Markers each #1-30	1 booklet
TCWM12	15 Markers each A-Z	
	21 Markers each POS, NEG, GND	1 booklet
	8 Markers +, 7 Markers -	
TCWM13	45 Markers each +, AC, DC,-	
	33 Markers each POS, NEG, GND	1 booklet
	27 Markers NEUT	
	21 Markers each SPARE & BLANK	
TCWM14	45 Markers each 0-9	
	15 Markers each L1, L2, L3	1 booklet
	15 Markers each T1, T2, T3	
TCWM15	10 Markers each 46-90	1 booklet
TCWM16	10 Markers each 1-33, A, B, C, +,-	1 booklet
	T1, T2, T3, L1, L2, L3	

Space Labeling

Along with the line of computer printable labels, HellermannTyton offers a line of safety signs. These 7" x 10" signs are adhesive backed and made from durable R410 vinyl that features polyester overlaminate, making them suitable for indoor or outdoor use. Many signs are also available in a tough .060" thick polycarbonate. There are numerous legends available, with a sampling listed below. For additional legends, please contact HellermannTyton.

ANSI/TIA/EIA-606-A
Standard

"All spaces shall be labeled. It is recommended that labels be affixed at the entry to a space."

Sample Legends

Part Number	Legend	Pkg. Qty.
DANGER SIGNS		
10063	KEEP OFF	1
10032	NO ADMITTANCE	1
10055	NO ADMITTANCE AUTHORIZED PERSONNEL ONLY	1
CAUTION SIGNS		
12032	DO NOT ENTER	1
12043	KEEP THIS SPACE CLEAR AT ALL TIMES	1
12045	NO SMOKING	1
NOTICE SIGNS		
13000	NO ENTRY UNLESS AUTHORIZED	1
13001	AUTHORIZED PERSONNEL ONLY	1


For a complete list of legends and part numbers, contact HellermannTyton.

HELASIGN — Self-Laminating Labels

HELASIGN self-laminating label booklets come in 6 different colors and are very easy to use. The booklet conveniently fits in a pocket, while protecting the labels from dust prior to use. The self-laminating label's clear "tail" wraps around the text for excellent abrasion and moisture resistance and protection from dust and dirt. Available in three sizes, the HELASIGN accommodates cable diameters from .16" - .67"



Product Selection							
Part Number	Color	Dimensions (a x b x c)	Cable Diameter		Labels/ Booklet	Pkg. Qty.	
			min	max			
598-94920	White	.5" x .5" x 1.5"	.16 (4)	.28 (7)	240	1	
598-95920	White	.75" x .5" x 2"	.16 (4)	.43 (11)	120	1	
598-96920	White	1" x .75" x 3"	.24 (6)	.67 (17)	60	1	
598-94220	Red	.5" x .5" x 1.5"	.16 (4)	.28 (7)	240	1	
598-95220	Red	.75" x .5" x 2"	.16 (4)	.43 (11)	120	1	
598-96220	Red	1" x .75" x 3"	.24 (6)	.67 (17)	60	1	
598-94320	Orange	.5" x .5" x 1.5"	.16 (4)	.28 (7)	240	1	
598-95320	Orange	.75" x .5" x 2"	.16 (4)	.43 (11)	120	1	
598-96320	Orange	1" x .75" x 3"	.24 (6)	.67 (17)	60	1	
598-94420	Yellow	.5" x .5" x 1.5"	.16 (4)	.28 (7)	240	1	
598-95420	Yellow	.75" x .5" x 2"	.16 (4)	.43 (11)	120	1	
598-96420	Yellow	1" x .75" x 3"	.24 (6)	.67 (17)	60	1	
598-94520	Green	.5" x .5" x 1.5"	.16 (4)	.28 (7)	240	1	
598-95520	Green	.75" x .5" x 2"	.16 (4)	.43 (11)	120	1	
598-96520	Green	1" x .75" x 3"	.24 (6)	.67 (17)	60	1	
598-94620	Blue	.5" x .5" x 1.5"	.16 (4)	.28 (7)	240	1	
598-95620	Blue	.75" x .5" x 2"	.16 (4)	.43 (11)	120	1	
598-96620	Blue	1" x .75" x 3"	.24 (6)	.67 (17)	60	1	




Rite-On® Markers


HellermannTyton's Rite-On markers come with a reusable dispenser made from high impact plastic which is resistant to oils and grease. This dispenser is loaded with self-laminating labels that have a clear tail which seals the legend under clear vinyl. The dispenser can be reloaded over and over again with refill rolls, making it a cost-effective and efficient method of labeling. For best results, use a ballpoint pen with the Rite-On system.




Features of Rite-On Markers



- A special label window holds label firm for easy marking.



- Can be held easily in the palm of the hand to provide a flat writing surface.



- Label dispenses automatically when the liner is pulled from the front of the unit.

- Excess liner is easily cut off by tearing it over the edge guide at the front of the unit.
- Easy to reload, refills are readily available.
- Once reloaded, unit allows minimal label exposure to dust and moisture.
- Easily and conveniently fits in shirt or pants pocket.

Self-laminating Labels and Dispenser

Part No.	Write-On Area (W X L)	Marker Size W x L	Min. Wire Size	Wire Size Range		AWG	Product Selection	
				AWG	Max. Wire Size		Markers per Roll	Pkg. Qty.
RO101	3/4" x 7/8"	3/4" x 6"	.70"	4/0 on up	1.50"	4/0 on up	40	1 dispenser
RO175	3/4" x 3/4"	3/4" x 3"	.330"	4	.70"	4/0	90	1 dispenser
RO512	3/4" x 1/2"	3/4" x 1-7/8"	.263"	8	.330"	4	150	1 dispenser
RO514	3/4" x 3/8"	3/4" x 1-1/4"	.153"	14 ga.	.263"	8	200	1 dispenser
RO175WP*	3/4" x 3/4"	3/4" x 3"	.330"	4	.625"	4/0	90	1 dispenser

*Includes a pen.

Refill Rolls

Part No.	Description	Write-On Area	Marker Size	Product Selection	
				Markers per Roll	Pkg. Qty.
101REF	Refill Self-Laminating Marker Roll	3/4" x 7/8"	3/4" x 6"	40	1 Roll
175REF	Refill Self-Laminating Marker Roll	3/4" x 3/4"	3/4" x 3"	90	1 Roll
512REF	Refill Self-Laminating Marker Roll	3/4" x 1/2"	3/4" x 1-7/8"	150	1 Roll
514REF	Refill Self-Laminating Marker Roll	3/4" x 3/8"	3/4" x 1-1/4"	200	1 Roll
T82S	Black Permanent Marker				2/pack
T82R	Red Permanent Marker				2/pack



ANSI/TIA/EIA-606-A
Standard

"An identifier shall be marked on each termination hardware or its label.

"Color coding of termination fields can make administration more efficient by making the cabling system more intuitive and easily understood for those maintaining the system."

Termination Hardware Labeling

ANSI/TIA/EIA-606-A Label Color Coding

Color Code	Types of Termination
Green	Network Connections
Purple	Common Equipment
Gray	Second Level Backbone
Blue	Station Telecommunications Media
Brown	Interbuilding Backbone
Yellow	Miscellaneous Circuits
Red	Key Telephone Systems
Orange	Central Office Termination

Termination Hardware Labels

HellermannTyton's line of termination hardware labels features non-adhesive paper labels used to mark 110 wiring blocks. Color coded to meet ANSI/TIA/EIA-606-A specifications, they come on pin-fed sheets to be used on dot matrix printers; however, the pin-fed margins can also be removed to use with laser printers.



Product Selection


Part Number	Color	Dimensions	Pkg. Qty.
TAG110OR	Orange	7.9" x .475"	1,000 Strips
TAG110GR	Green	7.9" x .475"	1,000 Strips
TAG110PL	Purple	7.9" x .475"	1,000 Strips
TAG110GY	Gray	7.9" x .475"	1,000 Strips
TAG110BL	Blue	7.9" x .475"	1,000 Strips
TAG110BR	Brown	7.9" x .475"	1,000 Strips
TAG110YL	Yellow	7.9" x .475"	1,000 Strips
TAG110RD	Red	7.9" x .475"	1,000 Strips
TAG110WT	White	7.9" x .475"	1,000 Strips

Telecommunications Component Label Book

HellermannTyton's PPTCOM booklet of telecommunications component labels can be used for ANSI/TIA/EIA-606-A installations. The booklet contains over 1,000 clear labels that are pre-printed with various symbols, characters and designations, covering the most common component labeling applications. Each label is .625" in width by .1875" in height. Each page contains the following labels:

Legend	Qty. per Page
Voice 1	4
Voice 2	4
Voice 3	2
Voice 4	2
Data 1	4
Data 2	4
Data 3	2
Data 4	2
Printer	2
Fax	4
Modem	4
Video	4
Lan	4
E-net	4
Voice	3
Data	3
Phone Image	8
Computer Image	8
Modem Image	4
Phone	4
1	4
2	4
3	2
4	2
5	2
6	2
A	2
B	2
C	2
D	2
E	2
F	2

There are 10 pages, each page contains 104 markers as described above.

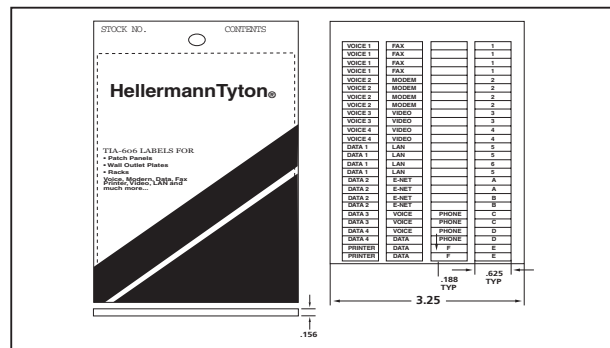

Product Selection

Part Number	Label Dimension	Contents	Pkg. Qty.
PPTCOM1	0.625" x 0.1875"	1,040 labels	1 Book

Identification Products

Tags

A. "Caution" Write-On Laminating Tags - Clear self-laminating plastic flap that permanently protects the writing and data marked on the tag. Orange or yellow, printed with black text. Write on them with a permanent pen (FTP1). Attach using standard cable ties.

B. Generic Write-On Tags - Self-laminating clear plastic flap permanently seals in the written information. Orange with black pre-printed lines. Write on them with a permanent pen (FTP1). Attach using standard cable ties.

C. Cable Write-On Tags - Self-laminating clear plastic flap permanently seals in the written information. Print the cable number, destination, source and fiber count. Orange with black text. Mark with a permanent pen (FTP1) for optimum results. Attach with standard cable ties.

D. Adhesive Write-On Labels - Self-laminating clear plastic flap permanently seals in the written information. Attach laminated information using the adhesive backing. Orange with black text. Mark with a permanent pen (FTP1).

E. Ground Wire Tags - A warning not to disconnect or remove ground wire. Orange with black text.



A





B



C



D



E

Product Selection

Part Number	Legend	Size	Color	Pkg. Qty.
(A) CT2003X2	Fiber Optic Cable	3.5" x 2"	Orange	25
(A) CT2012X2	Telephone Cable	3.5" x 2"	Yellow	25
(B) CT0753X2	-	3" x .75"	Orange	25
(B) CT1503X2	-	4" x 1.5"	Orange	25
(C) WC1503X2	-	4" x 1.5"	Orange	25
(D) CTA0753X2	Cable No.	3" x .75"	Orange	25
(D) CTA1503X2	Cable No.	4" x 1.5"	Orange	25
(E) GWT003X2	Telephone	3" x 1.5"	Orange	25
(E) GWC003X2	Cable TV	3" x 1.5"	Orange	25

Fiber Optic Cable Markers

Manufactured from .035" thick polyethylene. Secure with standard cable ties. Use with a permanent felt tip marker. Temperature Range: -150 °F to 150 °F

Product Selection


Part Number	Length	Height	Pkg. Qty.
FOM-75	1.5"	.75"	25
FOM-150	2.25"	1.5"	25
FOM-175	3.5"	1.75"	25

Fiber Mark Cable Markers

Non-adhesive identification system for fiber optic cable. Produced from heavy duty, precoiled plastic, Fiber Mark cable markers can be uncoiled, then snapped into place. The text is protected by a thick layer of clear acrylic which provides UV protection and abrasion resistance. For more information on customized legends, contact HellermannTyton.

Product Selection

Part Number	Marker Length	Cable Diameter	Pkg. Qty.
CMF04	4"	.490" - 1.0"	25
CMF072	7.25"	.490" - 1.0"	25



Fiber Optic Cable Tape

Designed to be used on the Lightguide Fiber Optic Protection System to identify the routing of fiber optic cable. It is a 1" wide orange vinyl with black lettering which states, "FIBER OPTIC CABLE." The legend is repeated every 6 inches.

Product Selection

Part Number	Temp. Range	Roll Length	Pkg. Qty.
TFOT-1	40°F - 200°F	54 ft.	1 roll

