

ATW03D

Tubular screw terminal block, centerline 8 mm / 0.315 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry

Technical Data

V / A / AWG	300 / 20 / 22 - 12
V / A / AWG	400 / 10 / 20 - 18
Screw torque	max. 3.5 lbs.-in
1.5 mm ²	400 V / 17.5 A
Screw torque	max. 0.4 Nm
Wire strip length	5.3 mm / 0.209 in.
Pole size	1 to 12
Color	Natural

ATW04D


Tubular screw terminal block, centerline 8 mm / 0.315 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry, wire protector

Technical Data

V / A / AWG	300 / 20 / 22 - 12
V / A / AWG	400 / 10 / 20 - 18
Screw torque	max. 3.5 lbs.-in
1.5 mm ²	400 V / 17.5 A
Screw torque	max. 0.4 Nm
Wire strip length	5.3 mm / 0.209 in.
Pole size	1 to 12
Color	Natural

Dimensions in mm

1 mm = 0.0394 in.

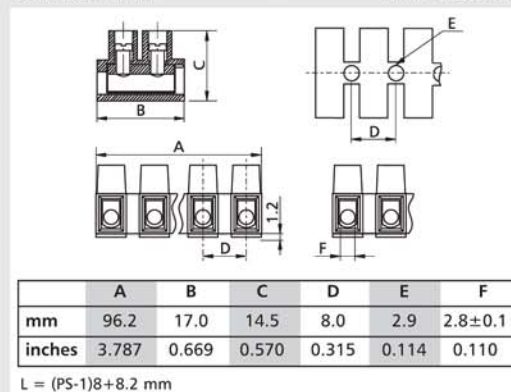

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW03D

centerline 8 mm / 0.315 inches


P/N ATW03D

01	02	03	04	05	06	07	08
09	10	11	12				

Standard pole sizes
 Consult factory

Dimensions in mm

1 mm = 0.0394 in.

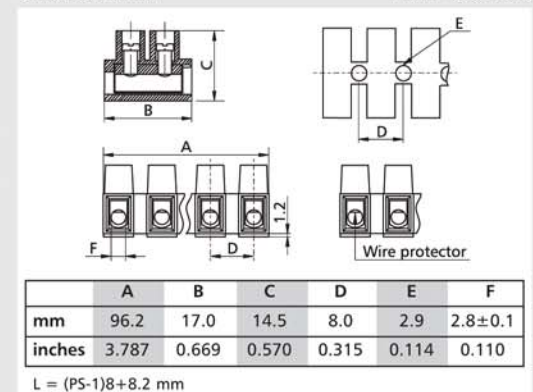

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW04D

centerline 8 mm / 0.315 inches

P/N ATW04D

01	02	03	04	05	06	07	08
09	10	11	12				

Standard pole sizes
 Consult factory