


# Single-Phase PumpSaver®Plus

## Model 111P

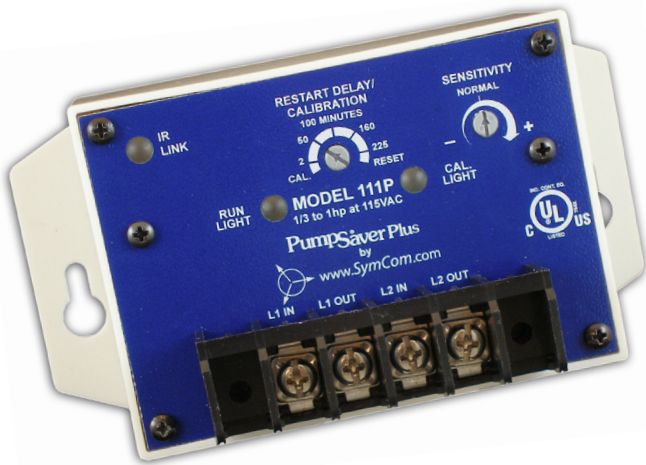



The Model 111P single-phase PumpSaver®Plus is a pump monitor designed to protect single-phase pumps from dry-well, dead-head, jammed impeller, rapid cycle and overvoltage and undervoltage conditions. The PumpSaver®Plus Model 111P protects 115 volt, 2 or 3 wire, 1/3 to 1 hp pumps.

A calibration adjustment allows the Model 111P to be calibrated to your specific pumping applications, thereby reducing the possibility of false or nuisance tripping. A proprietary microcontroller based voltage, power factor and current-sensing circuit constantly monitors for power fluctuations, overcurrent and underload conditions. When an abnormality, such as loss of suction, is detected, the PumpSaver®Plus deactivates its output relay and directly disconnects the pump motor. The PumpSaver®Plus then begins its user-selectable "Restart Delay" (dry-well recovery) timer. When the timer expires or power is removed and reapplied, the PumpSaver®Plus reactivates its output relay, allowing the pump to turn back on.

Picture may not be representative of actual product.

An infrared LED communicates directly with a hand-held diagnostic tool called the Informer (sold separately).

NOTE: The PumpSaver®Plus models have a sensitivity adjustment for the dry-well trip point. After calibration is done, you can adjust the sensitivity for the dry-well/dead-head trip point from 70-90% of the full load. This makes the unit even more adaptable to varying pumping applications. If you have a very low producing well, you increase the sensitivity closer to the 90% mark, or if you have a very heavy producing well, you would decrease the sensitivity around the 70% mark.

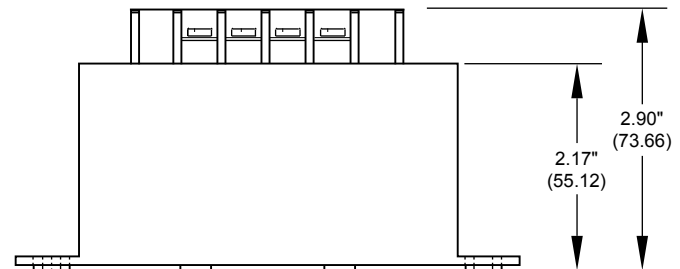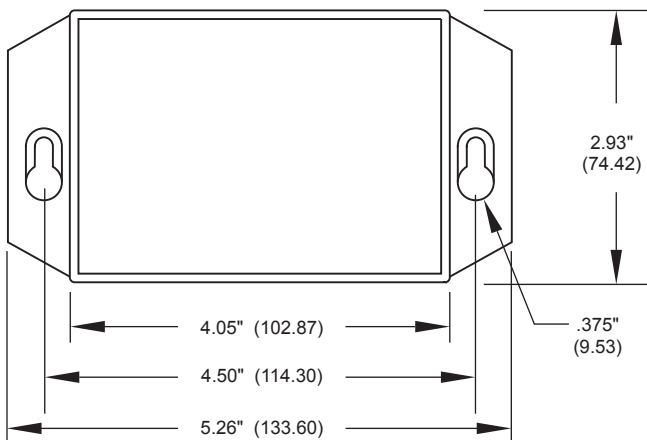

## Specifications

<b>Functional Specifications</b>	
Adjustments/Settings	
Overcurrent	125% of calibration point
Underload (dry-well)	Adjustable (70 to 90% of calibrated run power)
Overvoltage	132.5VAC
Undervoltage	95VAC
Number of restarts allowed in a 60-second period (rapid-cycling)	4
Trip Delay Times	
Overcurrent	5 seconds
Dry-well	4 seconds
Restart Delay Times	
Over/undervoltage	2 seconds
All other faults	Manual, 2-225 Minutes
<b>Input Characteristics</b>	
Supply Voltage	115VAC
Load Range	$\frac{1}{3}$ - 1 hp
Frequency	50/60Hz (note: 50Hz will increase all delay timers by 20%)
<b>Output Characteristics</b>	
Output Contact Rating-SPST	1hp@115VAC (16 amps max.)
<b>General Characteristics</b>	
Operating Temperature	-40° to 55° C (-40° to 131° F)
Maximum Input Power	5 W
Wire Gauge	Solid or Stranded 10 - 22AWG
Terminal Torque	13 in.-lbs.
Standards Passed	
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 2, 4kV contact, 6kV air
Surge Immunity	IEC 61000-4-5, Level 4, 4kV line-to-line and line-to-ground
Safety Marks	
cUL Listed	UL508, C22.2 No. 14
Dimensions	5.26" W x 2.93" H x 2.90" D
Weight	14 oz.
Mounting Methods	#8 screws

### How to order:

Part Number: 111P

111P-ENCL (for more information see spec sheet for ENCL enclosure)



[www.SymCom.com](http://www.SymCom.com)

... your electronic control & protection specialists

(605) 348.5580 / (800) 843.8848 / Fax (605) 348.5685  
 customerservice@symcom.com / technicalsupport@symcom.com