



SymCom's Model 777-HVR-KW/HP-P2 is a fully programmable electronic power monitor. It is designed to monitor and protect any 3-phase, 340-480VAC motor drawing 2-800 full load amps (external CTs are required above 90 amps). This unit's Form C contacts are pilot duty rated at 470VA@600VAC for applications where a control power transformer (CPT) is used on a 480V system. This feature saves the cost and extra wiring associated with a CPT. It provides unsurpassed protection from faulty voltage, underload and overload conditions. The 777-HVR-KW/HP-P2 can be used in a variety of 3-phase applications and features a low power trip point (adjustable on the unit) that is desirable any time the current vs. load characteristic is non-linear or has little change. In general, this applies to small slow speed motors, small centrifugal motors and fractional horsepower motors. Low power protection can be used any time in place of undercurrent protection.

The 777-HVR-KW/HP-P2 incorporates a 3-digit LED display that is used for programming, providing real-time operational information and displaying diagnostic codes to aid in troubleshooting a fault condition. It also displays kilowatts and horsepower on the face of the unit.

The 777-HVR-KW/HP-P2 can be used as a stand-alone product or used in a network to communicate with a PC, PLC, SCADA system, or SymCom's Solutions Software with the help of its built-in RS-485 communications port. The 777-HVR-KW/HP-P2, in conjunction with SymCom's CIO modules, supports several communication protocols including Modbus/RTU, Modbus/TCP, DeviceNet™ and Profibus. The units can also be connected to SymCom's remote monitors for a simple, cost-effective way to meet new requirements for arc-flash safety.

The unit's many features include enhanced trip classes beyond the NEMA standard trip classes. The settable trip class range is 2-60, with or without jam protection, and a secondary linear trip delay can be set with a range of 0-60 seconds. If both the trip class and linear trip delay are set, the 777-HVR-KW/HP-P2 will follow the faster trip time. Another feature is the automatic dry-well recovery timer that allows the unit to automatically select a restart delay based on the last cycle's run time. This allows the 777-HVR-KW/HP-P2 to optimize restart delay times.

The 777-HVR-KW/HP-P2 can be pre-programmed with a 9-volt battery prior to actual installation. This can save a lot of time during initial installations and avoid subsequent service calls when commissioning new projects.

Features:

- Protects 3-phase motors from:
 - High voltage
 - Low voltage
 - Voltage unbalance
 - Reverse-phase
 - Overcurrent
 - Underload (low power)
 - Current unbalance
 - Single-phase
 - Ground fault, Class II
- Network programmable
- Programmable with 9-volt battery prior to installation
- Automatic reset with three separate restart delay timers, or manual reset
- Tamper guard
- RS-485 communications port (communications module sold separately)
- 3-digit LED diagnostic display
- Last fault memory
- UL and ULC listed
- CE compliant
- CSA approved
- Surface or DIN rail mount
- 5-year warranty
- Made in USA

Auxiliary Products:


- Remote Displays (RM-1000/RM-2000)
- Communication Modules
- Remote Manual Reset Kit
- Solutions Software

Specifications

Functional Specifications	
Programmable Operating Points LV-Low Voltage Threshold HV-High Voltage Threshold VUB-Voltage Unbalance Threshold MULTI-# of Conductors or CT Ratio (xxx:5) OC-Overcurrent Threshold PWS-Power Scale LP-Low Power CUB-Current Unbalance Threshold TC-Overcurrent Trip Class RD1-Rapid Cycle Timer RD2-Restart Delay After All Faults Except Undercurrent (motor cool-down timer) RD3-Restart Delay After Undercurrent (dry-well recovery timer) #RU-Number of Restarts After Undercurrent ADDR-RS485 Address COM-Communication setting #RF-Number of Restarts After All Faults Except Undercurrent UCTD-Undercurrent Trip Delay ** GF-Ground Fault Current Threshold	340-523V 341-528V 2-25% or 999 (disabled) 1-10, 100, 150, 200, 300, 400, 500, 600, 700, 800 (20-100A) + MULT of 80-140% of CT Primary 1 = 0.01-0.99kW 5 = 0.01-1.32hp 2 = 1.00-9.95kW 6 = 1.34-13.3hp 3 = 10.0-99.5kW 7 = 13.4-133hp 4 = 100-650kW 8 = 134-871hp 0.01-650kW or 0.01-871hp or 0 (off); LP setting is dependent on PWS setting. PWS must be set prior to LP being set 2-50% or 999 (disable) 2-60, J2-J60, L00-L60, oFF 0-999 seconds 2-500 minutes 2-500 minutes, A (Automatic) 0, 1, 2, 3, 4, A (Automatic) A01-A99 C00-C07 0, 1, oc1, 2, oc2, 3, oc3, 4, oc4, A, ocA (Automatic) 5 seconds (default) (3-20A) + MULT or 12-40% of CT Primary or oFF
Input Characteristics	
Supply Voltage Frequency Motor Full Load Amp Range	340-480VAC 50/60Hz 2-20A, (looped conductors required); 20-80A (direct); 80-800A (external CTs required)
Output Characteristics	
Output Contact Rating - SPDT (Form C) Pilot Duty Expected Life Mechanical Electrical	470VA@600VAC, B300 1 x 10 ⁶ operations 1 x 10 ⁵ operations at rated load
General Characteristics	
Operating Temperature Ambient Operating Ambient Storage Accuracy at 25° C (77° F) Voltage Current Timing Ground Fault Repeatability Voltage Current Maximum Input Power Pollution Degree Class of Protection Relative Humidity Terminal Torque Standards Passed Electrostatic Discharge (ESD) Radio Frequency Immunity (RFI), Conducted Radio Frequency Immunity (RFI), Radiated Fast Transient Burst Short Circuit Surge IEC ANSI/IEEE Hi-potential Test Vibration Shock Safety Marks UL CE Max Conductor Size through 777-P2 Dimensions Weight Mounting Method	-20° to 70° C (-4° to 158° F) -40° to 80° C (-40° to 176° F) ± 1% ± 3% (<100A direct) ± 0.5 second ± 15% (<100A) ± 0.5% of nominal voltage ± 1% (<100A direct) 10 W 3 IP20 10-95%, non-condensing per IEC 68-2-3 7 in.-lbs. IEC 61000-4-2, Level 3, 6kV contact, 8kV air IEC 61000-4-6, Level 3 10V IEC 61000-4-3, Level 3 10 V/m IEC 61000-4-4, Level 3, 3.5 kV input power 100kA 61000-4-5 Level 3, 2kV line-to-line; Level 4, 4kV line-to-ground C62.41 Surge and Ring Wave Compliance to a level of 6kV line-to-line Meets UL508 (2 x rated V + 1000V for 1 minute) IEC 68-2-6, 10-55Hz, 1mm peak-to-peak, 2 hours, 3 axis IEC 68-2-27, 30g, 3 axis, 11ms duration, half-sine pulse UL508, UL1053 IEC 60947-1, IEC 60947-5-1 0.65" with insulation 3.05 H x 3.85 W x 5.05 D in. (77.47 x 97.79 x 128.27 mm) 1.2 lbs. (544.31 g) Surface mount (4 - #8 screws) or DIN Rail Mount

** Network adjustable only

Enclosure Dimensions

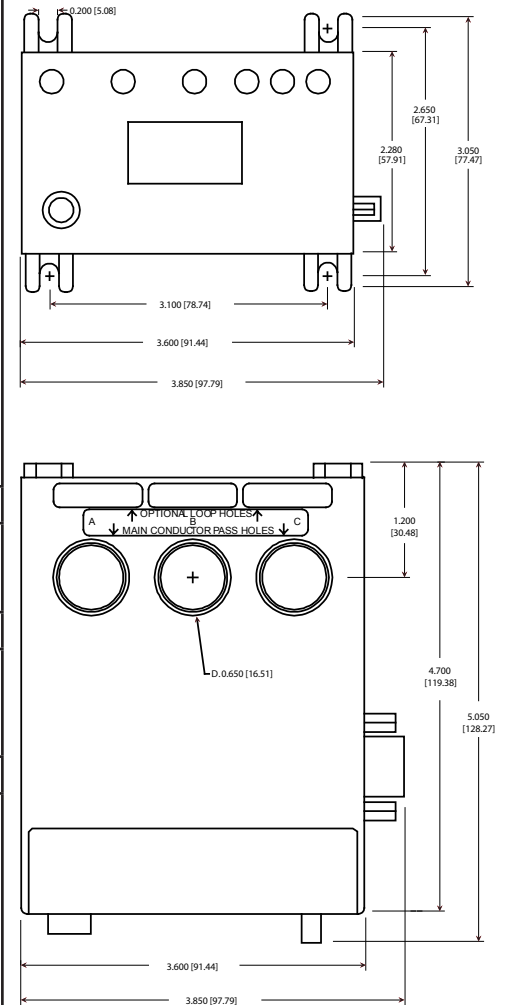

inches (millimeters)

How to order:

Part Number: 777-HVR-KW/HP-P2

SymCom
 222 Disk Drive
 Rapid City, SD 57701
 www.SymCom.com

SSAC
 8242 Loop Rd
 Baldwinsville, NY 13027
 www.SSAC.com

CustomerService@SymCom.com • TechnicalSupport@SymCom.com
 800.843.8848 • 605.348.5580 • 605.348.5685 fax