

# Data sheet

## M12 field plug X-coded, straight

Page 1/7


P/N  
**MNF881A315-0001**  
**EAN 4250184151166**

2018-27-03


### Illustrations



Dimensional drawing

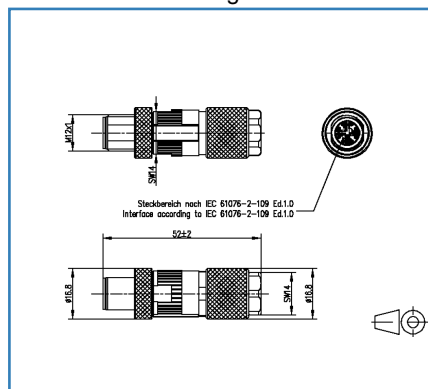

Wiring

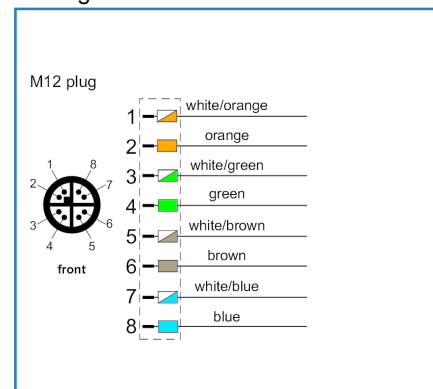

See enlarged drawings at the end of document

### Product specification

- M12 Cat.6<sub>A</sub> X-coded plug based on IEC PAS 61076-2-109 and suitable for field assembly
- suitable for 10 GBit Ethernet (IEEE 802.3an), Remote Powering (PoE, PoE plus and UPoE) and HDBaseT
- for a 8-wire M12 plug for AWG 22
- connection of AWG 26/1 - 22/1; AWG 26/7 - 22/7 possible
- solid copper wire diameter from 0.4 to 0.64 mm
- stranded copper wire diameter from 0.48 to 0.76 mm
- core diameter up to 1.6 mm
- cable jacket from 5.0 to 9.7 mm
- consists of only 2 parts
- easy assembly - connection without special tools
- zinc die-cast housing for industrial use
- suitable for applications in the railway industry



## Data sheet M12 field plug X-coded, straight

Page 2/7

P/N  
MNF881A315-0001  
EAN 4250184151166

2018-27-03

### Technical Data

#### General Data

Design	Plugs
Shielding	shielded
Transmission technology	Copper
Dimensions	
Dimension (L x W x H)	52.00 x 16.80 x 16.80 mm
Dimension (L x W x H)	2.047 x 0.661 x 0.661 in.
Field assembly ability	yes
Labeling option	on housing

#### Transmission characteristics

Category (ISO)	6 <sub>A</sub>
Category (TIA)	6A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
HDBaseT	yes
Transmission rate up to 10 GBit (Gigabit-Ethernet)	IEEE 802.3an

#### Connections/interfaces

Connector technology interface 1	IDC-connection
Connector technology interface 2	M12-plug
Number of ports interface 2	1
Number of equipped ports interface 2	1
Number of positions/contacts interface 1	8
Number of positions/contacts interface 2	8
Termination data, solid wire (min. - max.)	
Conductor cross section, solid wire	AWG 26/1 - 22/1
Conductor cross section, solid wire	0.128 - 0.324 mm <sup>2</sup>
Conductor diameter, solid wire (bare copper)	0.409 - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 - 0.025 in.



### Technical Data

#### Connections/interfaces

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire	AWG 26/7 - 22/7
Conductor cross section, stranded wire	0.141 - 0.355 mm <sup>2</sup>
Conductor diameter, stranded wire (bare copper)	0.483 - 0.762 mm
Conductor diameter, stranded wire (bare copper)	0.019 - 0.030 in.
Core diameter (min. - max.)	
Core diameter (conductor with insulation)	0.85 - 1.60 mm
Core diameter (conductor with insulation)	0.033 - 0.063 in.
Cable sheath diameter (min. - max.)	
Cable sheath diameter	5.00 - 9.70 mm
Cable sheath diameter	0.197 - 0.382 in.
Cable access/outlet	straight M12

#### Electrical characteristics

Current carrying capacity	0.5 A
Rated voltage	50 V AC / 60 V DC
Through resistance	max. 5 mOhm
Insulation resistance	min. 100 MOhm
Dielectric strength conductor-conductor (primarily)	500 V DC

#### Mechanical characteristics

Mounting method	screwable
Insertion and withdrawal force	max.30 N
Life - Number of mating cycles	min. 100

#### Materials and material properties

Material - Housing	GD-Zn (zinc die-cast)
Material - Contact	CuZn (brass)
Material - Contact finish	Ni + Au (nickel-gold)
Material - Shield	CuSn (tin bronze)
Material - Shield finish	Sn (tin)
Material - Stuffer cap	PA UL94-V0
Material - Finish	Ni (nickel)



## Data sheet M12 field plug X-coded, straight

Page 4/7

P/N  
MNF881A315-0001  
EAN 4250184151166

2018-27-03

### Technical Data

#### Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 - 85 °C
Temperature - Storage °F	-40 - 185 °F
Temperature - Operating °C	-40 - 85 °C
Temperature - Operating °F	-40 - 185 °F
Particulate ingress	IP6X when plugged in
Liquid ingress/immersion	IPX7 when plugged in
Damp heat	25 °C / +40 °C / 93% RH // 5 cycles
Overvoltage category	III
Pollution degree	2
Electromagnetic measurement	E <sub>2</sub>
Shock	490 m/s <sup>2</sup>

#### Approvals

RoHS	compliant
UL listed (file no.)	DUXR.E178484

#### The product meets the following standards

Application-specific communications cabling systems	
Profinet	yes
Connectors for electronic equipment	
circular connector	DIN EN 61076-2-109:2010-08
Railway applications	
Electronic equipment used on rolling stock	DIN EN 50155
Fire protection on railway vehicles	DIN EN 45545-2

#### Classifications

ETIM 5.0	EC001121
ETIM 6.0	EC001121

### Technical Data

#### Packing details

Type of packaging	10 pc(s) / box
Packaging unit - Weight (gram)	345.00 g
Packaging unit - Weight (pound)	0.76 lb
Packaging dimension (W x H x D)	247.00 x 161.00 x 58.00 mm
Packaging dimension (W x H x D)	9.724 x 6.339 x 2.283 in.



Data sheet

## M12 field plug X-coded, straight

Page 6/7

P/N

MNF881A315-0001

EAN 4250184151166

2018-27-03

### Accessories

P/N	Designation
130670-E	KAPRi plus cable and installation tester
130674-E	KAPRi plus extension set M12 X-coded
700669	M12 plug protection cap IP54



## Data sheet M12 field plug X-coded, straight


Page 7/7

P/N  
MNF881A315-0001  
EAN 4250184151166

2018-27-03

### Illustrations

#### Dimensional drawing

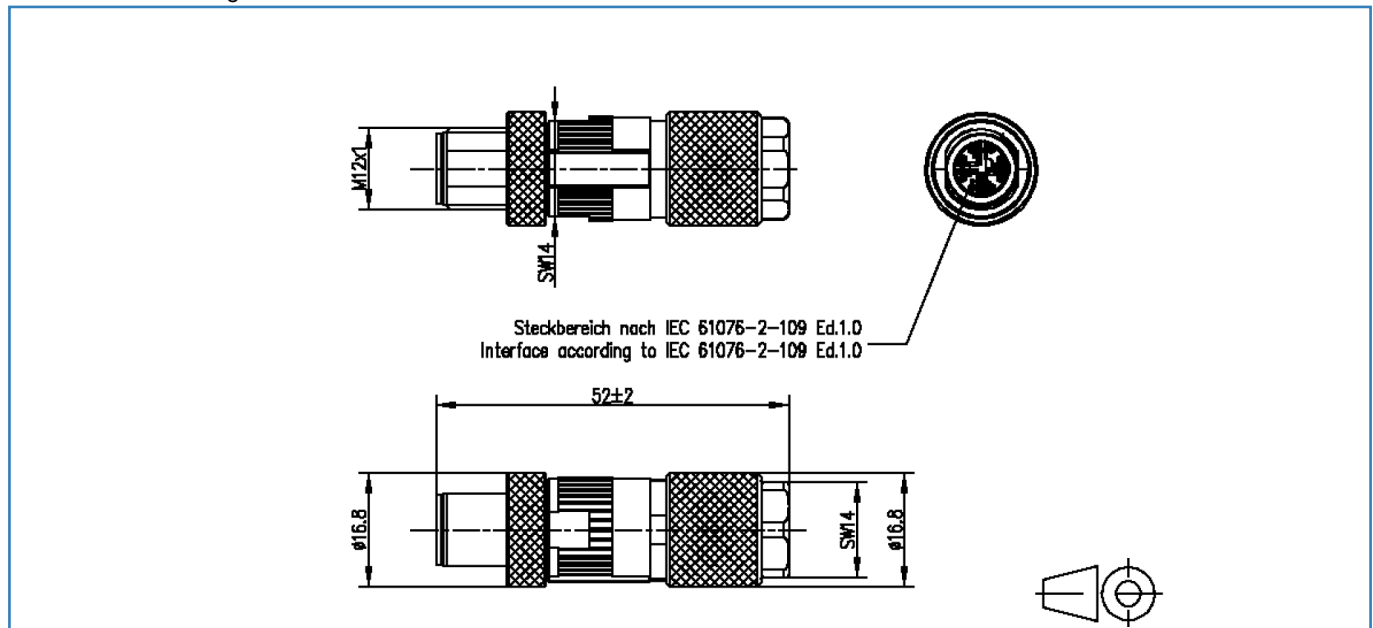

#### Wiring

